

PREZENTUJE



Occhio


Occhio









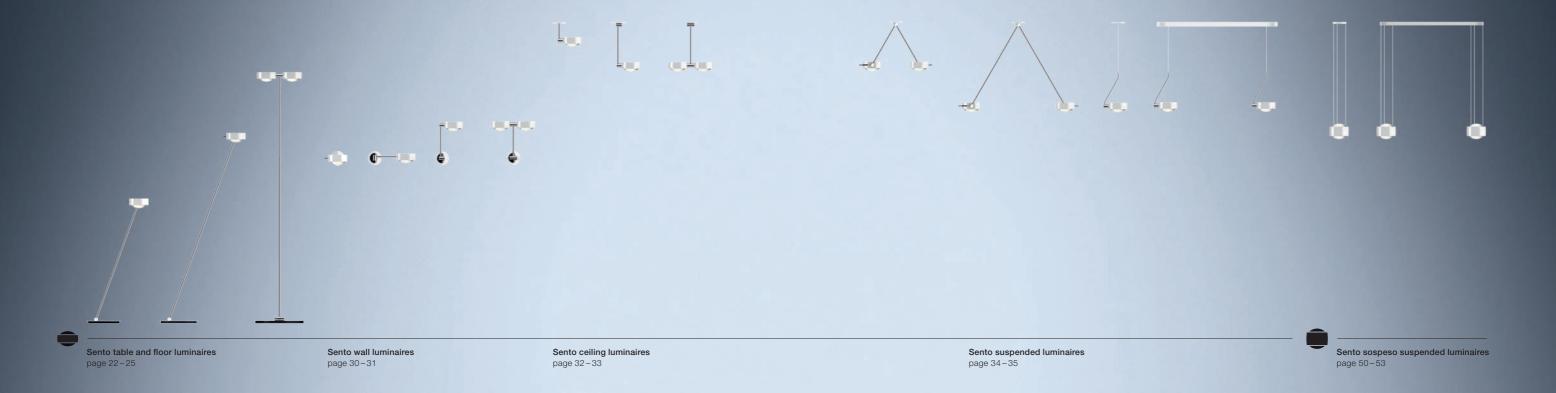






















The innovative, modular luminaire system for residential and public areas

18 L series/Sento L series/Sento

Sento

the innovative, modulare luminaire system

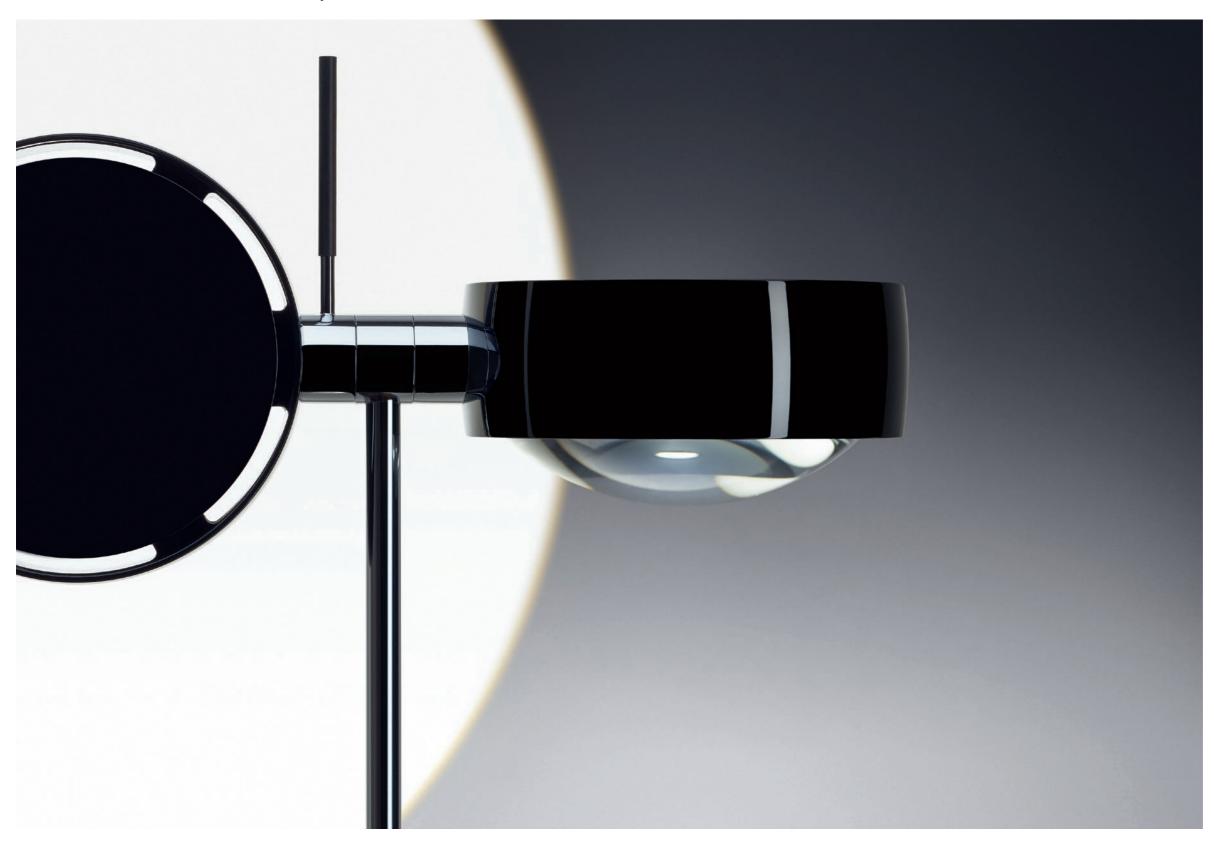





choose your light – single-sided or double-sided luminaire heads, changeable inserts for individual lighting effects and a selection of different LED light colors allow for a precise adjustment of the desired light to every situation. While offering the best color rendering (CRI 97) and highest efficiency.



Occhio air – the intuitive Bluetoothcontrol, directly integrated in the head (optional).

With Sento, you can exactly define the light – and thus compose your own design message. Sento is modular and multifaceted. And it can be used both for residential and public settings.

20 L series / Sento 21

Sento table and floor luminaires – features





touchless control – with the help of »touchless control« Sento can be switched, dimmed or faded with simple gestures – touchlessly and intuitively thanks to innovative infrared sensors.

two in one – Sento with its doublesided light output is equipped with two LED chips. As a result, uplight and downlight can be operated independently of each other.

up/down fading – a unique feature: Via gesture control, the full light output can be drawn from one side to the other.



Occhio air – the intuitive Bluetooth-control, directly integrated in the head (optional).

Perfect light answers. If you touch the light of Sento it is switched, dimmed and directed in the room. This creates fascinating moments – thanks to a sensor which perfectly understands people.

table and floor luminaires

light source 2700K/3000K, perfect color LED (CRI97)

lighting effects and lumen indications see page 36+39

surfaces head, base

chrome, glossy white, glossy black, matt chrome, matt white, matt black



surfaces body

chrome, matt chrome

create your light myOcchio.de






Occhio air control (optional) detailed informations can be found on page 158-165



Sento tavolo 60, 80 cm: 40° adjustable, base ø 24 cm, body 360° rotatable (can be fixed), head 360° rotatable, 18 W, controllable via »touchless control« (at the head) and Occhio air

Sento lettura 125 cm: 18° adjustable / 160 cm: 12° adjustable, base ø 27cm, body 360° rotatable (can be fixed), head 360° rotatable, 18 W, controllable via »touchless control« (at the head) and Occhio air



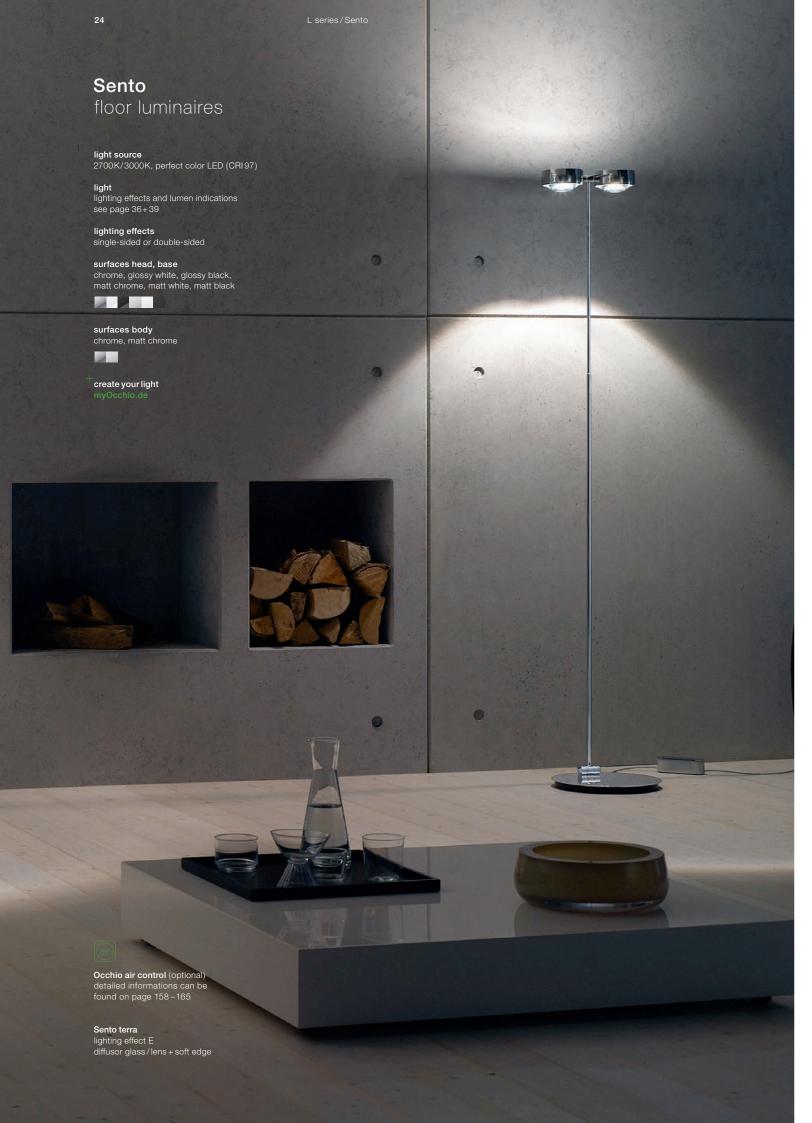






Sento terra 180 cm, base ø 32 cm, body 360° rotatable (can be fixed), 12° adjustable, head 360° rotatable, 2×26W/2×18W, controllable via »touchless control« (at the head), controller and Occhio air



One luminaire, unlimited possibilities: Sento terra provides you with two independently adjustable luminaire heads – and infinite freedom in design

26 L series/Sento

Sentowall and ceiling luminaires

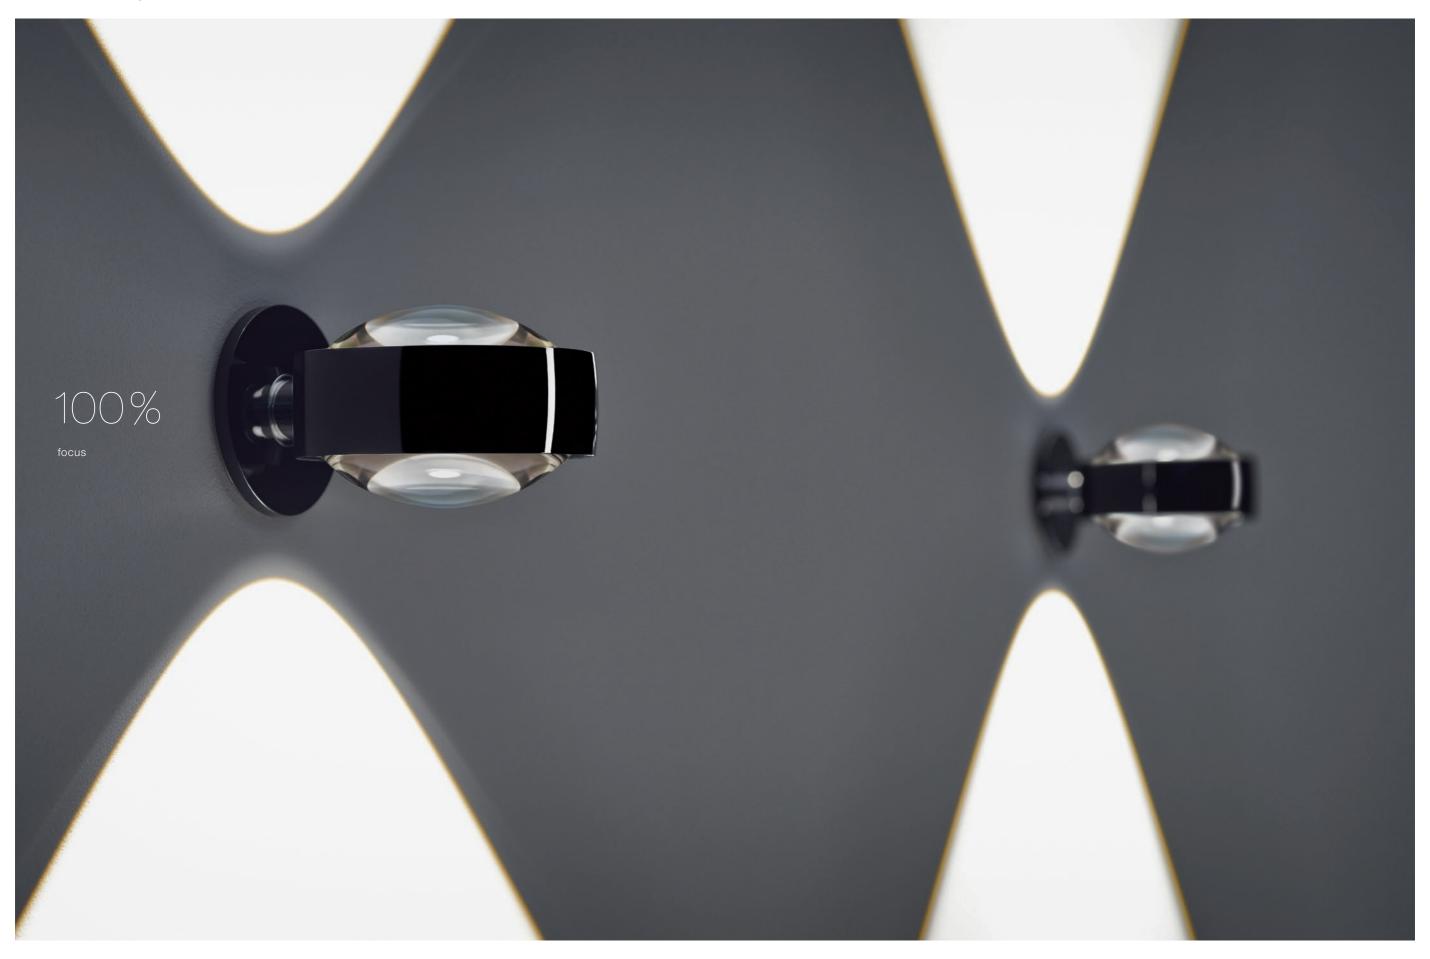

28 L series / Sento L series / Sento

Sento
wall and ceiling luminaires – features





up/down presetting for doublesided wall and ceiling luminaires – any desired ratio of uplight and downlight can be set and saved in five stages via the »step« function – with full overall output. You can then dim uplight and downlight together – on the basis of the stored settings! This way several luminaires in a room can simply and precisely coordinated with each other.



up/down fading – with the help of Occhio air, the entire light output can be drawn from one side to the other continuously: a unique experience.



Occhio air – the intuitive Bluetoothcontrol, directly integrated in the head (optional).

Sento adapts itself perfectly to you. It begins with your personal preference, your desired ratio of uplight to downlight – and your mise-en-scène can start.

wall luminaires

light source

2700K/3000K, perfect color LED (CRI 97)

lighting effects and lumen indications see page 36+39

lighting effects

single-sided or double-sided

mounting options

»flat« recessed »up« surface mount

surfaces head chrome, glossy white, glossy black, matt chrome, matt white, matt black



surfaces base

chrome, glossy white, matt chrome, matt white (verticale only: glossy black, matt black)



surfaces body

chrome, matt chrome



create your light myOcchio.de





Sento verticale

 $360\,^\circ$ rotatable, $26\,W/18\,W$, controllable via »touchless control« (at the head) and Occhio air, alternatively dimmable via trailing-edge phase cut dimmer

Sento letto

20 cm: 105° adjustable/ $30\,cm$: 115° adjustable/ $40\,\text{cm}\colon 140^{\circ}$ adjustable, head 360° rotatable, 26 W/18 W, dimmable via trailing-edge phase cut dimmer, controllable via »touchless control« (at the head) and Occhio air







Occhio air control (optional) detailed informations can be found on page 158-165

Sento parete singolo 20, 30, 40 cm: 120° adjustable, head 360° rotatable, 26 W/18 W, dimmable via trailing-edge phase cut dimmer, controllable via »touchless control « (at the head) and Occhio air

Sento parete doppio 20, 30, 40 cm: 120° adjustable, head 360° rotatable, 2×26W/2×18W, dimmable via trailing-edge phase cut dimmer, controllable via »touchless control« (at the head) and Occhio air







surfaces body chrome, matt chr

create your light

Occhio air control (optional) detailed informations can be found on page 158-165

Sento soffitto due flat 40 lighting effect E







Sento soffitto singolo

30, 40, 60 cm: 120° adjustable / 80 cm: $90\,^{\circ}$ rotatable, head $360\,^{\circ}$ rotatable, on request 180° rotatable, 26 W/18 W, dimmable via trailing-edge phase cut dimmer, controllable via »touchless control« (at the head) and Occhio air

Sento soffitto doppio

30, 40, 60 cm: 120° adjustable / 80 cm: 90° adjustable, head 360° rotatable, on request 180° rotatable, 2×26W/2×18W, dimmable via trailing-edge phase cut dimmer, controllable via »touchless control« (at the head) and Occhio air

Sento soffitto due

30, 40, 60 cm: 120° adjustable / 80 cm: 90° adjustable, head 360° rotatable, on request 180° rotatable, 2×26 W/2×18 W, dimmable via trailing-edge phase cut dimmer, controllable via »touchless control« (at the head) and Occhio air





Sento faro 10, 20, 30 cm, body 360° rotatable, head 360° rotatable, 26 W/18 W, dimmable via trailing-edge phase cut dimmer, controllable via »touchless control« (at the head) and Occhio air

Sento faro track 10, 20, 30 cm, body 360° rotatable, head 360° rotatable, 26 W/18 W, dimmable via trailing-edge phase cut dimmer and Occhio air, also available as DALI-version

suspended luminaires

light source

2700K/3000K, perfect color LED (CRI 97)

light

lighting effects and lumen indications see page 36+39

lighting effects

single-sided or double-sided

mounting options

»flat « recessed »up « surface mount

surfaces head

chrome, glossy white, glossy black, matt chrome, matt white, matt black



surfaces base

chrome, matt chrome.



canopy linea

matt white

create your light myOcchio.de



max. 280 cm, head 360° rotatable, 26W/18W, controllable via *touchless control« (at the head) and Occhio air, alternatively dimmable via trailing-edge phase cut dimmer, also available as track-version (dimmable via trailing-edge phase cut dimmer or DALI)

Sento soffitto due

80, 100, 125 cm: 90° adjustable, on request 180° rotatable, head 360° rotatable, 2×26 W/2×18 W, controllable via *touchless control « (at the head) and Occhio air, alternatively dimmable via trailing-edge phase cut dimmer





Occhio air control (optional) detailed informations can be found on page 158-165

Sento linea due

cable length 80–180 cm, body 360° rotatable, head 360° rotatable, L 125 cm, adjustable luminaire distance 60–120 cm, 2×26 W/2×18 W, controllable via »touchless control« (at the head) and Occhio air, alternatively dimmable via trailing-edge phase cut dimmer, synced luminaire heads


Sento linea tre (no figure)
with 3 heads L 125 cm, adjustable luminaire
distance 40–60 cm or L 185 cm, adjustable
luminaire distance 60–90 cm
Sento linea quattro (no figure)
with 4 heads L 185 cm, adjustable luminaire
distance 30–70 cm



lighting effects – double-sided



Sento A diffusor glass / diffusor glass 1500 lm (26 W), 1090 lm (18 W)

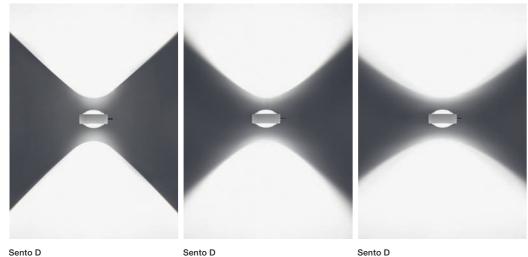

lens + soft edge glass (80°)/ lens + soft edge glass (80°)

L series / Sento

Sento D lens (80°)/ lens (80°) 1750 lm (26 W), 1270 lm (18 W)

Sento E


diffusor glass/

1620 lm (26 W), 1170 lm (18 W)

lens (80°)




Sento E diffusor glass / lens + soft edge glass (80°)



Sento E diffusor glass/ lens+satinised glass (100°)

lens + satinised glass (100°)/ lens + satinised glass (100°)



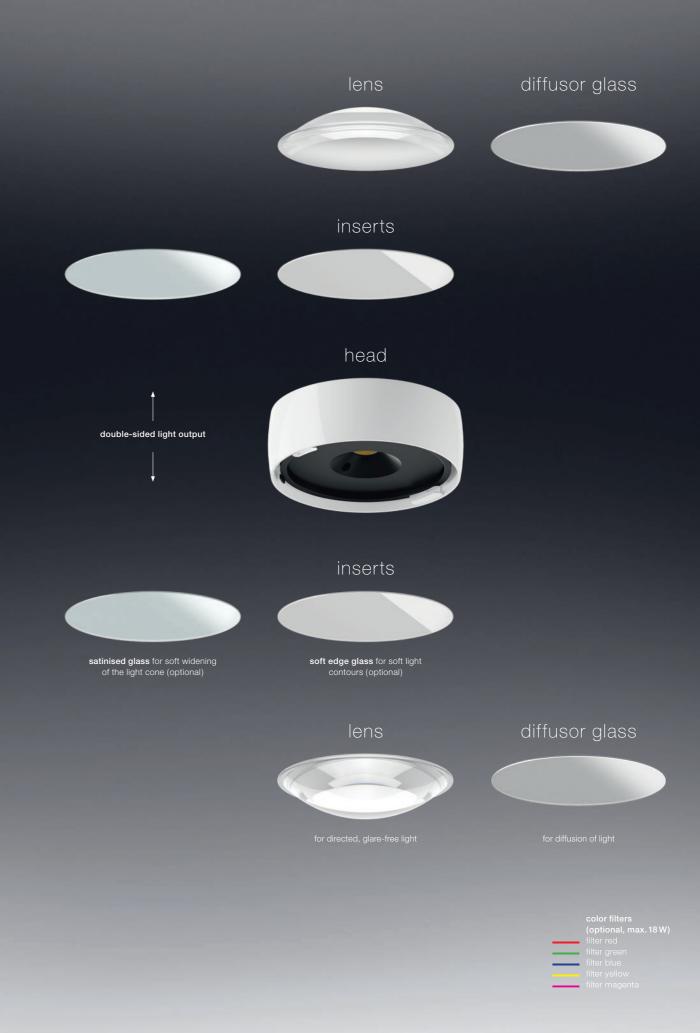

head single-sided light output spot lens

L series / Sento










Sento lighting effects – single-sided




Sento B diffusor glass 1370 lm (26 W), 1000 lm (18 W)

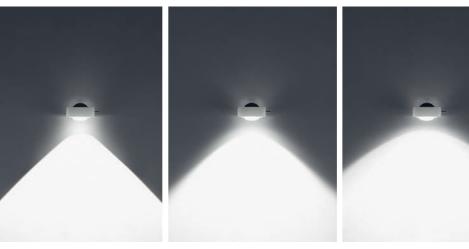

Sento C lens (80°) 1570 lm (26 W), 1140 lm (18 W)

Sento C lens + soft edge glass (80°)

Sento C lens + satinised glass (100°)



lens + soft edge glass + spot lens (40°)





40 L series / Sento


Sento lighting effects




Sento D lens/

42 L series/Sento

Sento lighting effects

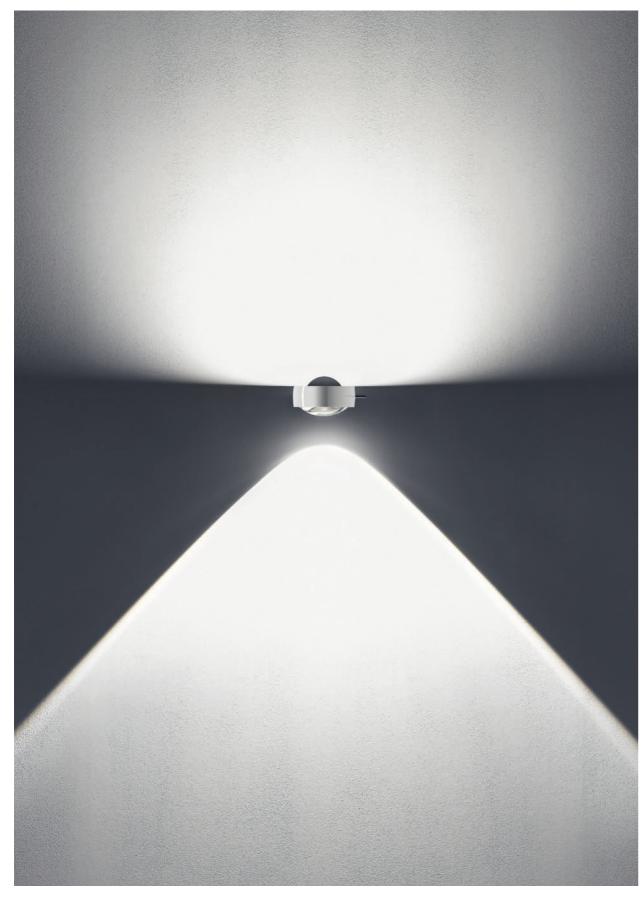

Sento E diffusor glass/ lens

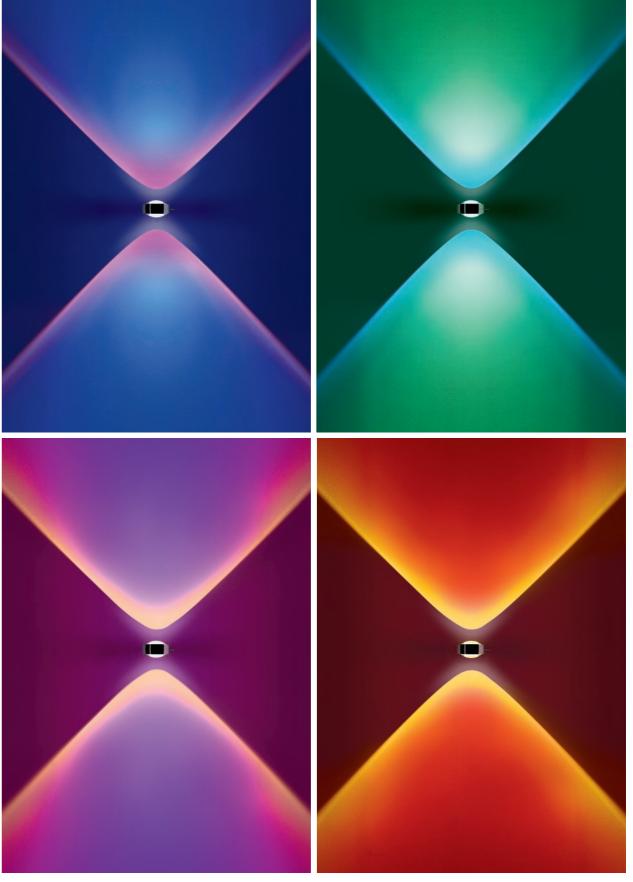

43

Sento D lens + color filter blue lens + color filter magenta

Sento D lens + color filter green lens + color filter red



Sento sospeso

The essence of maximum quality of light and ease of use








L series / Sento sospeso

Sento sospeso

the unique suspended luminaires system

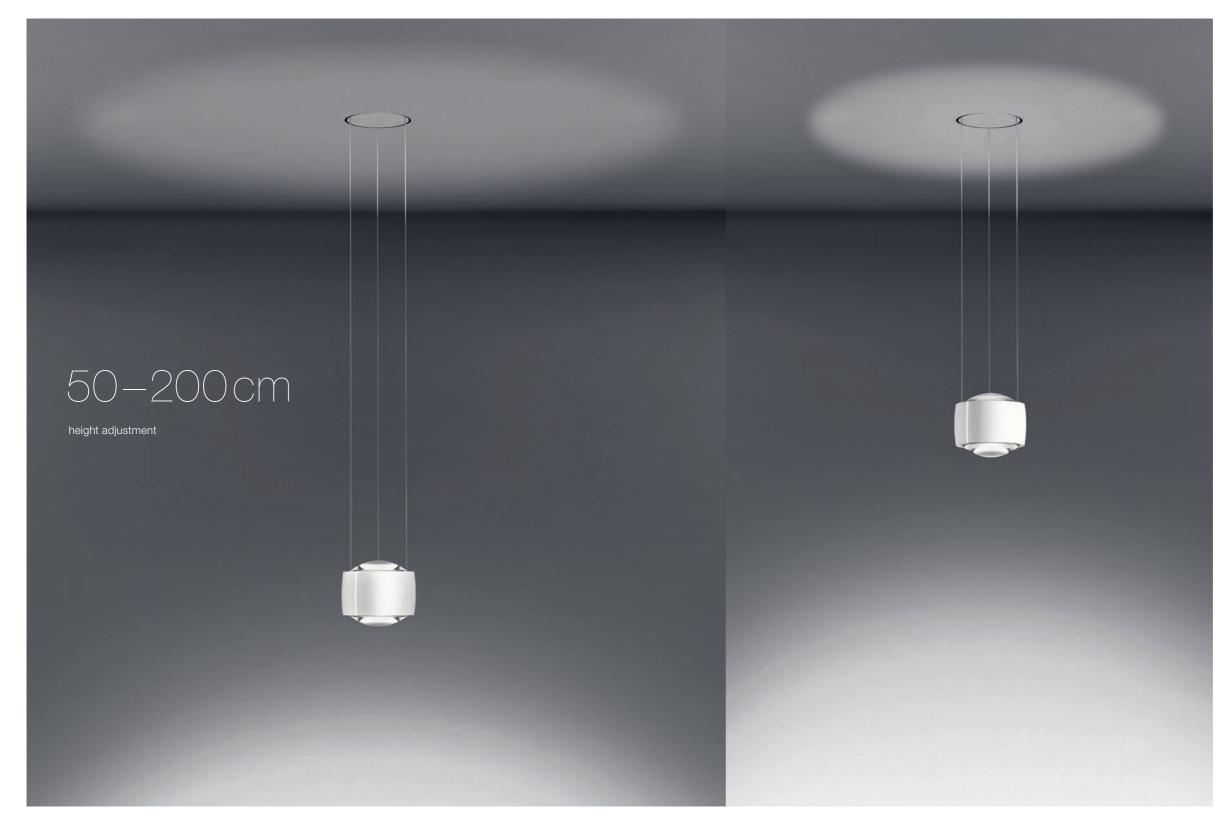




height adjustment – with the optional height adjustment feature, the pendant length can be adjusted between 50 cm and 200 cm. In the process, the cable disappears from view into the ceiling (**trimless** version, see illustration) or into the ceiling canopy.

The convenient height adjustment of the Sento sospeso is unparalleled: Thanks to a sophisticated reel mechanism, the pendant length can be easily and precisely adjusted at any time. The cables can be lengthened or shortened in a compeletely even and smooth motion.

48 L series/Sento sospeso 4

Sento sospeso

suspended luminaires – features

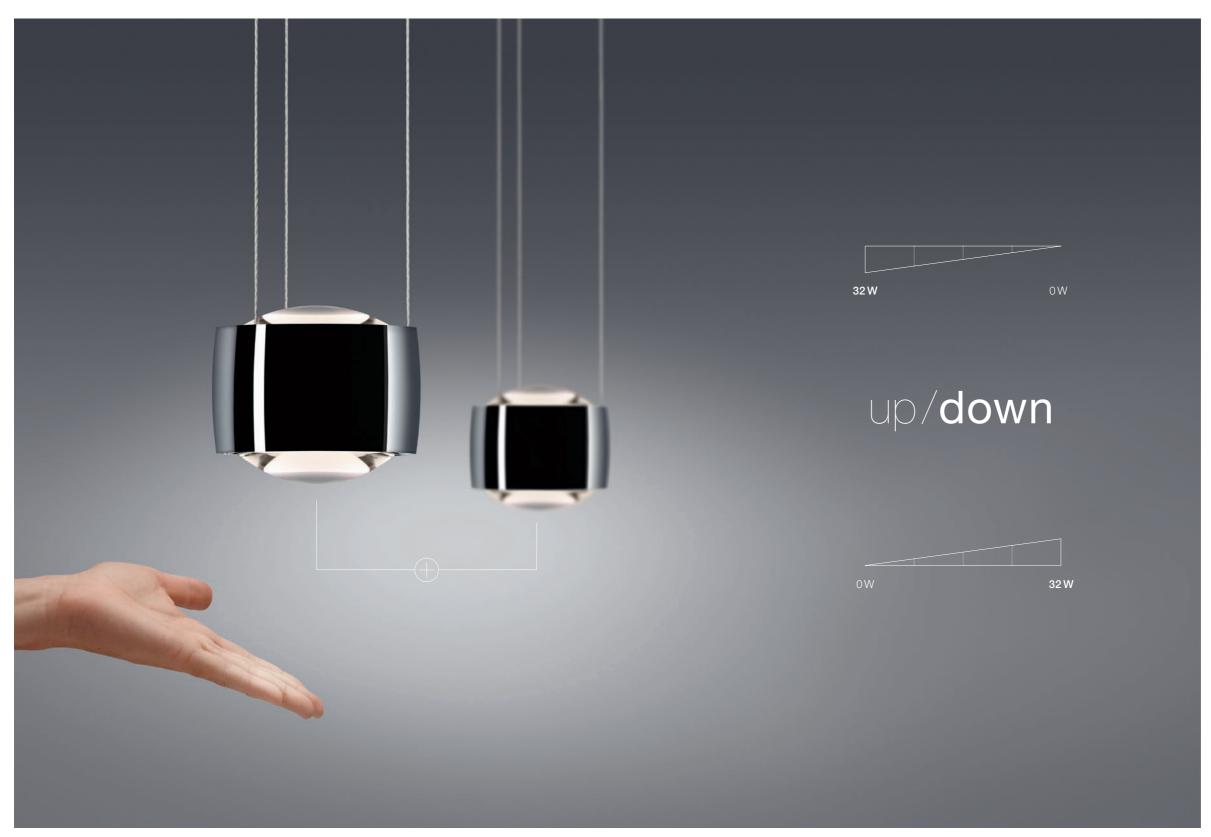



touchless control – Sento sospeso can be switched and dimmed with simple gestures – touchlessly and intuitively thanks to innovative infrared sensors.



up/down fading – using »touchless control« or Occhio air, the full light output can continuously be drawn from uplight to downlight.



synchronization – Sento sospeso is designed for luminaire sequences: Connected via a control line or grouped with Occhio air, the light settings can be synchronized (this feature is integrated in the due and tre models).



Occhio air – the intuitive Bluetoothcontrol, directly integrated in the head (optional).

The brightness is adjusted via »touchless control « directly at the light source – the head of the luminaire. Via gesture control, the full luminous power can be drawn from one side to the other.

Sento sospeso

suspended luminaires

light source

2700K/3000K, perfect color LED (CRI 97)


lighting effects and lumen indications see page 54

surfaces head, base

chrome, gold, glossy white, glossy black, matt chrome, matt white, matt black



create your light myOcchio.de

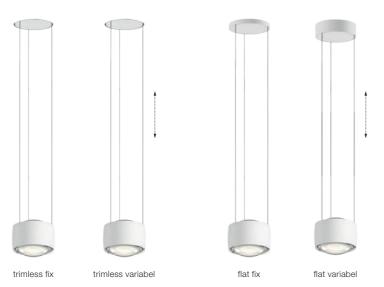

Sento sospeso trimless

flush ceiling mount, cable length 50-200 cm (variable)/max. 350 cm (fix), 32 W (chrome: 26 W), controllable via »touchless control« (at the head) and Occhio air, alternatively dimmable via trailing-edge phase cut dimmer

Sento sospeso flat

recessed mount, cable length 50-200 cm (variable) / max. 350 cm (fix), 32W (chrome: 26W), controllable via » touchless control« (at the head) and Occhio air, alternatively dimmable via trailing-edge phase cut dimmer





Occhio air control (optional) detailed informations can be found on page 158-165

Sento sospeso up surface mount, cable length 50 – 200 cm (variable)/max. 350 cm (fix), 32 W (chrome: 26 W), controllable via »touchless control« (at the head) and Occhio air, alternatively dimmable via trailing-edge phase cut dimmer



Sento sospeso

suspended luminaires

light source 2700K/3000K, perfect color LED (CRI97)

light
lighting effects and lumen indications see page 54

mounting options

ceiling canopy surface mount installation

surfaces head, base

chrome, gold, glossy white, glossy black, matt chrome, matt white, matt black





surface canopy



create your light myOcchio.de





Occhio air control (optional) detailed informations can be found on page 158-165

Sento sospeso due with 2 heads surface mount, cable length 50–200 cm (variable)/max. 350 cm (fix), L 102 cm, luminaire distance 90 cm), each 32 W (chrome: each 26 W), controllable via »touchless control« (at the head) and Occhio air, alternatively dimmable via trailing-edge phase cut dimmer,

Sento sospeso tre with 3 heads, L 192 cm, luminaire distance 90 cm (no figure)



L series/Sento sospeso

Sento sospeso

54

lighting effects



Sento D lens + soft edge glass (80°) lens + soft edge glass (80°) 2070 lm (32 W), 1690 lm (26 W)



Sento D lens + satinised glass (100°) lens + soft edge glass (80°)




Sento D lens + satinised glass (100°) lens + satinised glass (100°)



Sento E diffusor glass lens + soft edge glass (80°) 1940 lm (32 W), 1580 lm (26 W)



Sento E diffusor glass lens+satinised glass (100°)

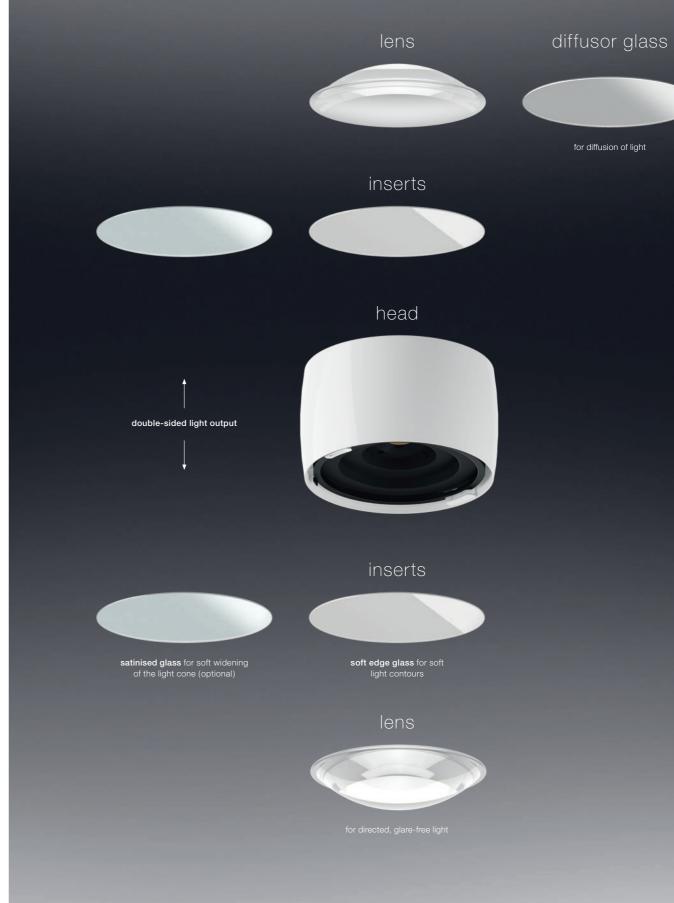









The power of innovation







L series/Più

Più the modular spotlight system for holistic lighting design





plug & play – Occhio VOLT makes the handling of light as easy as in the days of the light bulb: The innovative technology can be connected to the mains voltage without a power supply unit and opens the way to a world of revolutionary pure design.


Più combines recessed, surface-mounted and track spotlights into a comprehensive, modular system. Thanks to the Occhio VOLT light engine, surface-mounted spotlights can be installed without remote power supply units: » plug & play «

L series/Più
L series/Più

Più recessed, surface mount and track spotlights – features



Più offers unlimited possiblities for use. Clean lines represent the unifying element of all models, with the double hull forming its unique design feature. The »floating « lens in the middle gives the spotlight its unmistakable character. The latest »perfect color « LED technology and an array of lens optics create an extraordinary quality in light depiction.

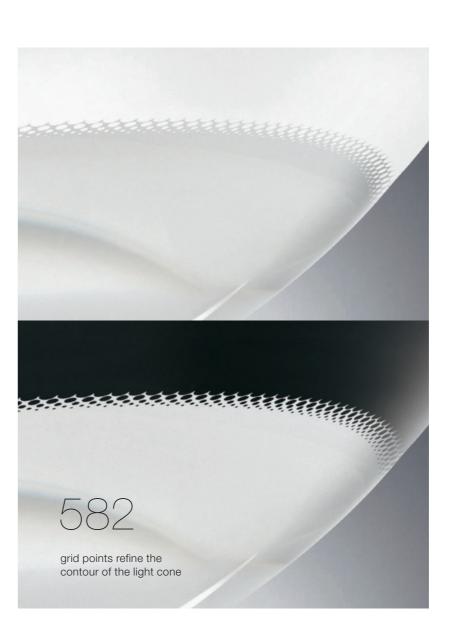



choose your light – characteristic Occhio lens optics work in synergy with changeable inserts to produce a quality of light that inspires – and provides nearly unlimited freedom for lighting design.



create your style – depending on the surface color of the head, you can choose between the lens with a black or with a white rim. This way the spotlights integrate perfectly into their environment.









Più alto

surface mount, body 360° rotatable, 52° swiveling, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)

surface mount, body 360° rotatable, 52° swiveling, 2 × 26 W (switchable 2 × 18/2 × 13 W), dimmable via trailing-edge phase cut dimmer or Occhio air

Più alto track

with in-trac adapter for 3-phase track (Eutrac/Erco), body 360° rotatable, 52° swiveling, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer







Più alto 3d surface mount, body 360° rotatable, 90° adjustable, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)

Più alto 3d doppio surface mount, body 360° rotatable, 90° adjustable, $2\times26\,\mathrm{W}$ (switchable $2\times18/2\times13\,\mathrm{W}$), dimmable via trailing-edge phase cut dimmer or Occhio air

Più alto 3d track with in-trac adapter for 3-phase track (Eutrac/Erco), body 360° rotatable, 90° adjustable, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer, also available as DALI-version

64 L series/Più

Più recessed spotlights



Più

recessed spotlights

light source VOLT light engine (230 V), 2700 K/3000 K, perfect color LED (CRI 97), (»cc« constant current version optional)

lighting effects and lumen indications see page 82

mounting options



square round seamless

surfaces head, cover

chrome, glossy white, glossy black, matt chrome, matt white, matt black





surfaces tube (inside) matt white, matt black



create your light myOcchio.de











with cover, head 360° rotatable, 30° swiveling, $26\,\mathrm{W}$ (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)

Più piano seamless

seamless (mounting board), head 360 $^{\circ}$ rotatable, $30\,^{\circ}$ swiveling, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending from power supply unit)









Occhio air control (optional) detailed informations can be found on page 158-165

Più piano in with cover, head recessed 360 $^{\circ}$ rotatable, 20° swiveling, 26W (switchable 18/13W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)

Più piano in seamless

seamless (mounting board), head recessed 360° rotatable, 20° swiveling, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)



68 L series/Più R

Più R the professional spotlight system in a striking look




70 L series / Più R 7

Più R
the professional spotlight system in a striking look



The design of Più R makes a compelling statement with its clear, minimalist lines. The flat cone glass creates a dynamic look while capturing the optical insert. The interior of the spotlight houses the characteristic Occhio lens that produces brilliant, glare-free light.

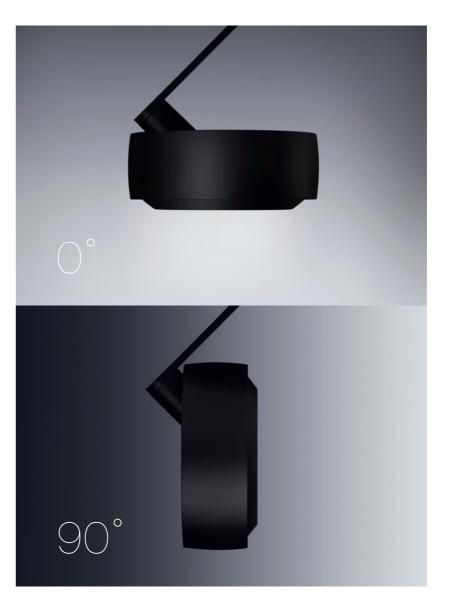



choose your light – characteristic Occhio lens optics work in synergy with changeable inserts to produce a quality of light that inspires – and provides nearly unlimited freedom for lighting design.



radical design – the spotlight series Più R with the flattened cone glass catches your eye with its striking appearance.

Più R

surface mount and track spotlights



surfaces body/cone glass chrome, matt chrome, matt white, matt black











73

Più R alto

surface mount, body 360° rotatable, 52° swiveling, 26 W (switchable 18 / 13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)

Più R alto doppio

surface mount, body 360° rotatable, 52° swiveling,

Più R alto track

with in-trac adapter for 3-phase track $2\times26\,\text{W (switchable }2\times18/2\times13\,\text{W), dimmable via} \\ \text{trailing-edge phase cut dimmer or Occhio air} \\ \text{(Eutrac/Erco), body }360\,^{\circ}\text{ rotatable,} \\ 52\,^{\circ}\text{ swiveling, }26\,\text{W (switchable }18/13\,\text{W),} \\ \text{dimmable via trailing-edge phase cut dimmer} \\ \text{(Eutrac/Erco), body }360\,^{\circ}\text{ rotatable,} \\ \text{(Switchable }18/13\,\text{W),} \\ \text{(dimmable via trailing-edge phase cut dimmer)} \\ \text{(Eutrac/Erco), body }360\,^{\circ}\text{ rotatable,} \\ \text{(Switchable }18/13\,\text{W),} \\ \text{(dimmable via trailing-edge phase cut dimmer)} \\ \text{(Eutrac/Erco), body }360\,^{\circ}\text{ rotatable,} \\ \text{(Switchable }18/13\,\text{W),} \\ \text{(dimmable via trailing-edge phase cut dimmer)} \\ \text{(Eutrac/Erco), body }360\,^{\circ}\text{ rotatable,} \\ \text{(Switchable }18/13\,\text{W),} \\ \text{(Switchable }18/13\,\text{W),} \\ \text{(dimmable via trailing-edge phase cut dimmer)} \\ \text{(Eutrac/Erco), body } \\ \text{(Switchable }18/13\,\text{W),} \\ \text{(Switchable$







Più R alto 3d

surface mount, body 360° rotatable, 90° adjustable, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)

Più R alto 3d doppio surface mount, body 360° rotatable, 90° adjustable, 2×26 W (switchable 2×18/2×13 W), dimmable via trailing-edge phase cut dimmer or Occhio air

Più R alto 3d track

with in-trac adapter for 3-phase track (Eutrac/Erco), body 360° rotatable, 90° adjustable, 26W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer, also available as DALI-version



Più R

recessed spotlights

light source VOLT light engine (230 V), 2700K/3000K, perfect color LED (CRI 97), (»cc« constant current version optional)

lighting effects and lumen indications see page 85

mounting options

 \bigcirc

square round

surfaces head, cover

chrome, glossy white, glossy black, matt chrome, matt white, matt black





surfaces tube (inside) matt white, matt black



surfaces cone glass chrome, matt chrome,













Più R piano

with cover, head 360° rotatable, 30° swiveling, 26W (switchable 18/13W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)

Più R piano seamless

seamless (mounting board), head 360 $^{\circ}$ rotatable, $30\,^{\circ}$ swiveling, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending from power supply unit)







square



Occhio air control (optional) detailed informations can be found on page 158-165

Più R piano in with cover, head recessed 360° rotatable, 20° swiveling, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)


Più R piano in seamless

seamless (mounting board), head recessed 360° rotatable, 20° swiveling, 26 W (switchable 18/13 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depending on power supply unit)



76 L series / Più RS 7

Più RS a class of its own

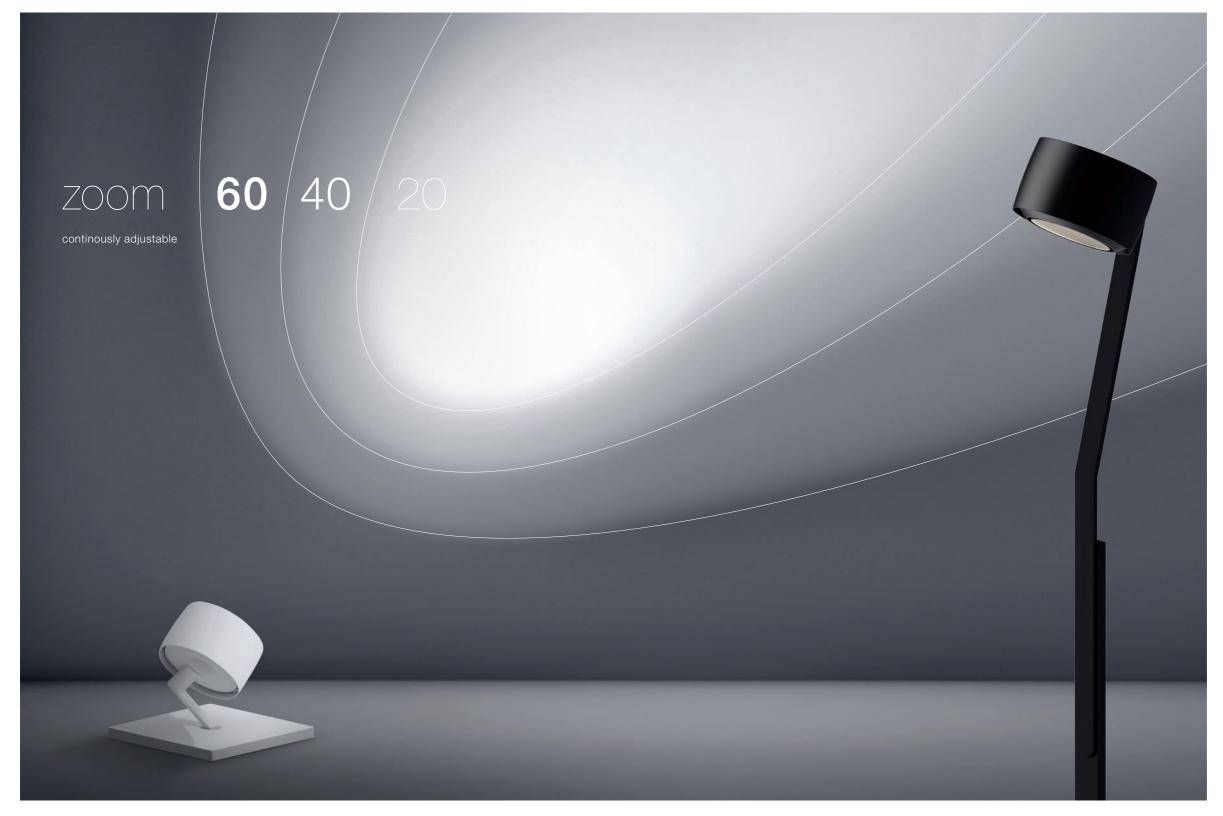







a class of its own – Più RS is equipped with an innovative zoom function with which the beam can be set continuously between 20° to 60°. Thanks to 3d kinematics, the light can be pointed in any direction. Adding to this are strong 32-watt LED power in a compact design. This creates exceptionally flexible situation-based lighting designs in residential and public settings.

Più RS ambience spotlights deliver exceptional performance with their high luminous power thanks to intelligent heat management. Their zoom and 3d kinematics features offer the utmost in flexibility. With its extraordinary floor spotlights basso and terra, Più RS opens up entirely new possibilities in lighting design.

Più RS

surface mount and track spotlights

light source 2700K/3000K, perfect color LED (CRI97)

lighting effects and lumen indications see page 85

lighting effect

zoom (continously 20°-60°) or fixed light cone with various inserts

surfaces head, base chrome, glossy white, glossy black, matt chrome, matt white, matt black



surfaces body, cone glass

matt black



create your light myOcchio.de



Più R alto 3d

for surface mount, body 360° rotatable, 90° adjustable, 32 W (chrome: 26 W), dimmable via trailing-edge phase cut dimmer or Occhio air (»cc« version depends on power supply unit)







Occhio air control (optional) detailed informations can be found on page 158-165

Più RS alto 3d track with in-trac adapter for 3-phase tracks (Eutrac/Erco), body 360° rotatable, 90° adjustable, 26 W, dimmable via DALI (only available as zoom)

Più RS alto 3d track DALI

with in-trac adapter for 3-phase tracks (Eutrac/ Erco), body 360° rotatable, 90° adjustable, 32 W (switchable 26/18/13 W), dimmable via trailing-edge phase cut dimmer (not available as zoom)



Più RS

floor spotlights

light source 2700K/3000K, perfect color LED (CRI97)

lighting effects and lumen indications see page 85

lighting effect

zoom (continously 20°-60°)

surfaces head, base/lower body (terra) chrome, glossy white, glossy black, matt chrome, matt white, matt black





surfaces body, cone glass

chrome, matt chrome, matt white, matt black







Più RS basso 16cm, base 18×18 cm, body 360° rotatable, 90° ausrichtbar, 26 W, dimmable via controller



Più RS terra 194 cm, base 30 × 30 cm, body 360° rotatable, 135° adjustable, 32 W (chrome: 26 W), dimmable via button at the luminaire body or controller



Più lighting effects

contour



C 80 lens (80°) VOLT 1290 lm (26 W) »cc« 1640 lm (26 W)

spot



S 100 satinised glass lens (100°) VOLT 1030 lm (26 W) »cc« 1260 lm (26 W)



soft edge glass lens (80°) VOLT 1140 lm (26 W) »cc« 1420 lm (26 W)



spot lens flat soft edge glass





spot lens medium soft edge glass lens (40°) VOLT 1280 lm (26 W) »cc« 1680 lm (26 W)



spot lens medium Fresnel lens lens (30°) VOLT 1270 lm (26 W) »cc« 1650 lm (26 W)





spot lens





medium

inserts



satinised glass for soft widening of the light cone (optional)



soft edge glass for soft light



Fresnel lens for additional

lens





head

spot lens



flat



medium



inserts



satinised glass for soft widening of the light cone (optional)




soft edge glass for soft light contours (optional)



Fresnel lens for additional bundeling (optional)

cone glass



for directed, glare-free light

color filters (optional, max. 18 W filter red filter green filter blue filter yellow filter magenta

Più R/RS

lighting effects

contour



C 100 cone glass spot lens flat (100°) VOLT 1340 lm (26 W) »cc« 1680 lm (26 W)*



C 80 spot lens medium cone glass (80°) VOLT 1400 lm (26 W) »cc« 1810 lm (26 W)*

spot



\$100 spot lens flat soft edge glass cone glass (100°) VOLT 1210 Im (26 W) »cc« 1520 Im (26 W)*



spot lens medium soft edge glass cone glass (80°) VOLT 1250 lm (26 W) »cc« 1690 lm (26 W)*



s60 spot lens high soft edge glass cone glass (60°) VOLT 1220 Im (26 W) *cc* 1610 Im (26 W)*



spot lens medium Fresnel lens cone glass (40°) VOLT 1220 lm (26 W) »cc« 1600 lm (26 W)*




\$ 30 spot lens high Fresnel lens cone glass (30°) VOLT 1250 lm (26 W) *cc« 1560 lm (26 W)*



flood

B spot lens flat satinised glass cone glass VOLT 1200 lm (26 W) *cc* 1370 lm (26 W)*

zoom (RS)



zoom 20 – 60° 1450 lm (32 W) 1180 lm (26 W)





M series

product overview




























io spotlights surface mount spotlights page 98–99

io spotlights recessed spotlights page 100-101



io 3d table and floor luminiares page 108-111



io 3d suspended luminaires page 116-117

io duna shape spotlights page 118-119


























lui spotlights surface mount and track spotlights page 130-131

lui spotlights recessed spotlights page 132-133



lui 3d floor spotlights page 138-139














lei 3d wall, and ceiling luminaires page 150-151

lei 3d suspended luminaires page 150-153





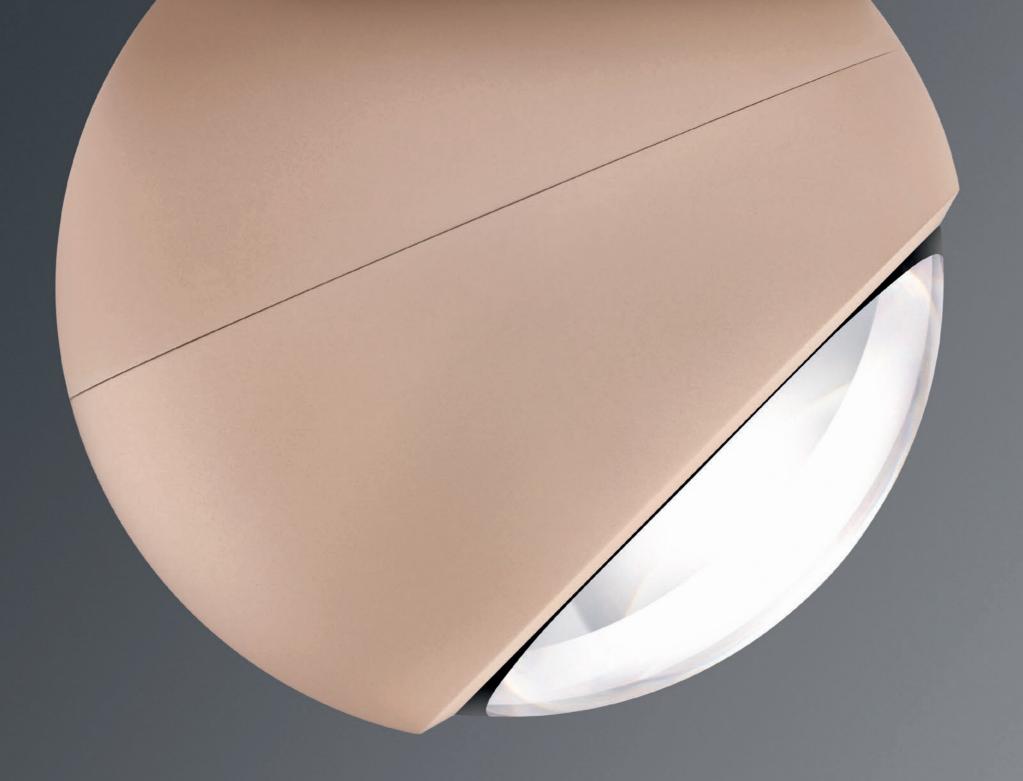



Pure design, magical mobility and unique operation: a totally new experience for interacting with light














M series/io spotlights

M series/io spotlights

io spotlights

recessed and surface mount spotlights – features





3d movability – the io giro surface-mount spotlight can be rotated freely thanks to the virtually invisible separation of the two sphere halves and can also be swiveled up to 45° from a vertical position. Its pure, spherical form always is highlighted.



plug & play – Occhio VOLT makes working with light as easy as it was in the days of the light bulb. The innovative 230 V LED technology can be used without power supply units and allows revolutionary, pure design.

The aesthetics of movement: io spotlights with their unmistakable minimalism. Magical movement functions and the characteristic lens optics make the io spotlights a unique, multifunctional system.

io spotlights

surface mount spotlights

light source VOLT light engine (230 V), 2700K/3000K, perfect color LED (CRI 97), (»cc« constant current version optional)

lighting effects and lumen indications see page 102

surfaces head

chrome, matt white, matt black, gold, bicolor white, bicolor black



surfaces base (doppio) matt white, matt black



+create your light myOcchio.de





surface mount installation, 360° rotatable, 45° adjustable, 13 W, dimmable via trailing-edge phase cut dimmer and Occhio air (»cc« version depending on power supply unit)

io alto v


surface mount installation, fix (not adjustable), 13 W, dimmable via trailing-edge phase cut dimmer and Occhio air (»cc« version depending on power supply unit)





Occhio air control (optional) detailed informations can be found on page 158-165

io giro doppio surface mount installation, head 360° rotatable, 45° adjustable, 2×13 W, dimmable via trailing-edge phase cut dimmer and Occhio air

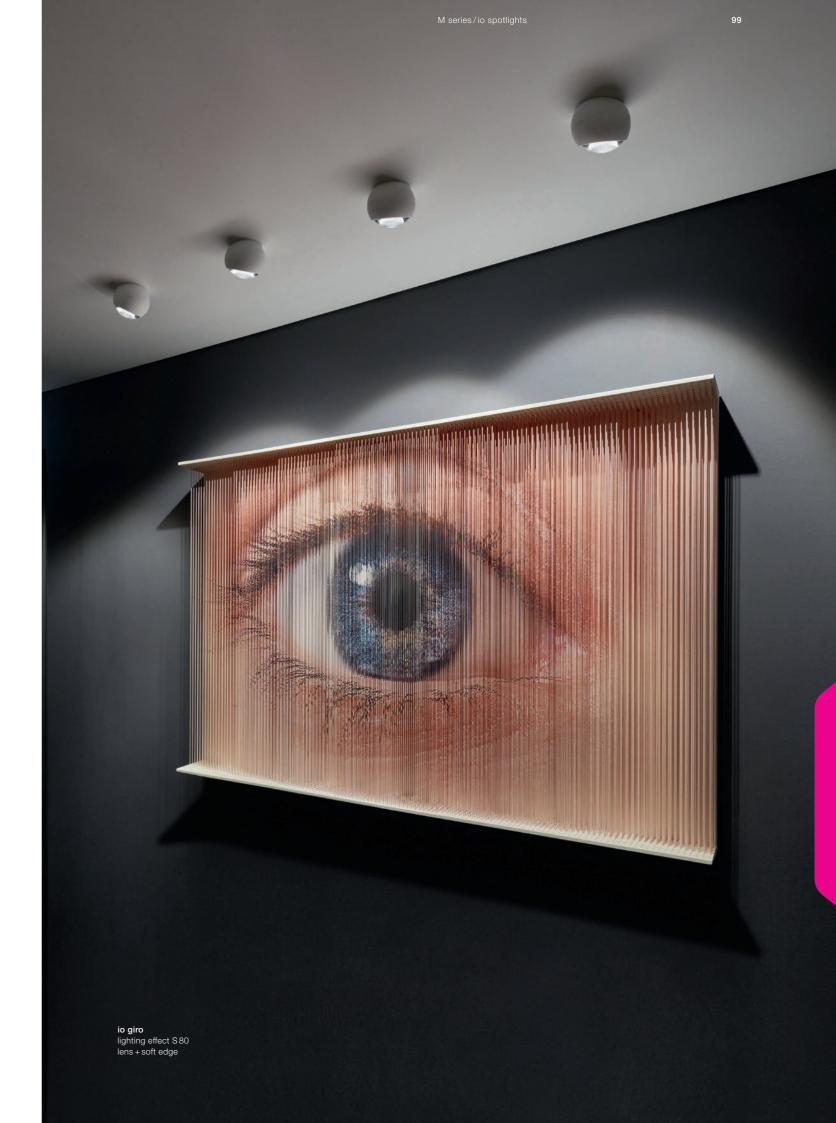

io spotlights

recessed spotlights

light source »cc« (constant current), 2700K/3000K, perfect color LED (CRI 97)

light lighting effects and lumen indications see page 102

mounting options







surfaces head, cover chrome, matt white, matt black, gold







M series/io spotlights



surfaces tube matt white, matt black

create your light







io piano square

with square cover, head 360° rotatable, $45\,^{\circ}$ swiveling, 13 W, dimmability depends on power supply unit or dimmable via Occhio air

io piano round

with round cover, head 360° rotatable, 45° swiveling, 13 W, dimmability depends on power supply unit or dimmable via Occhio air

io piano seamless

seamless (mounting board), head 360° rotatable, $45\,^{\circ}$ swiveling, 13 W, dimmability depends on power supply unit or dimmable via Occhio air







io piano v square with square cover, not swiveling, 13 W, dimmability depends on power supply unit or dimmable via Occhio air

io piano v round

with round cover, not swiveling, 13 W, dimmable depending on power supply unit or dimmable via Occhio air

io piano v seamless

seamless (mounting board), not swiveling, 13 W, dimmability depends on power supply unit or dimmable via Occhio air


io spotlights lighting effects



S100 lens + satinised glass 100°, diffuse light VOLT 550 lm (13 W) »cc« 740 lm (13 W)



S80 lens + soft edge glass 80°, soft contour VOLT 680 Im (13 W) »cc« 900 Im (13 W)



S 60 lens + Fresnel lens 60°, bundled light VOLT 650 lm (13 W) »cc« 830 lm (13 W)



C 80 lens 80°, directed light VOLT 730 lm (13 W) »cc« 1010 lm (13 W)



satinised glass for gently widened light cone (optional)



head

soft edge glass for soft light contours (optional)



Fresnel lens for additional focusing (optional)






for glare-free, directed light, with magnetic catch



104 M series/io 3d 10

io 3d the luminaire system for individual lighting design

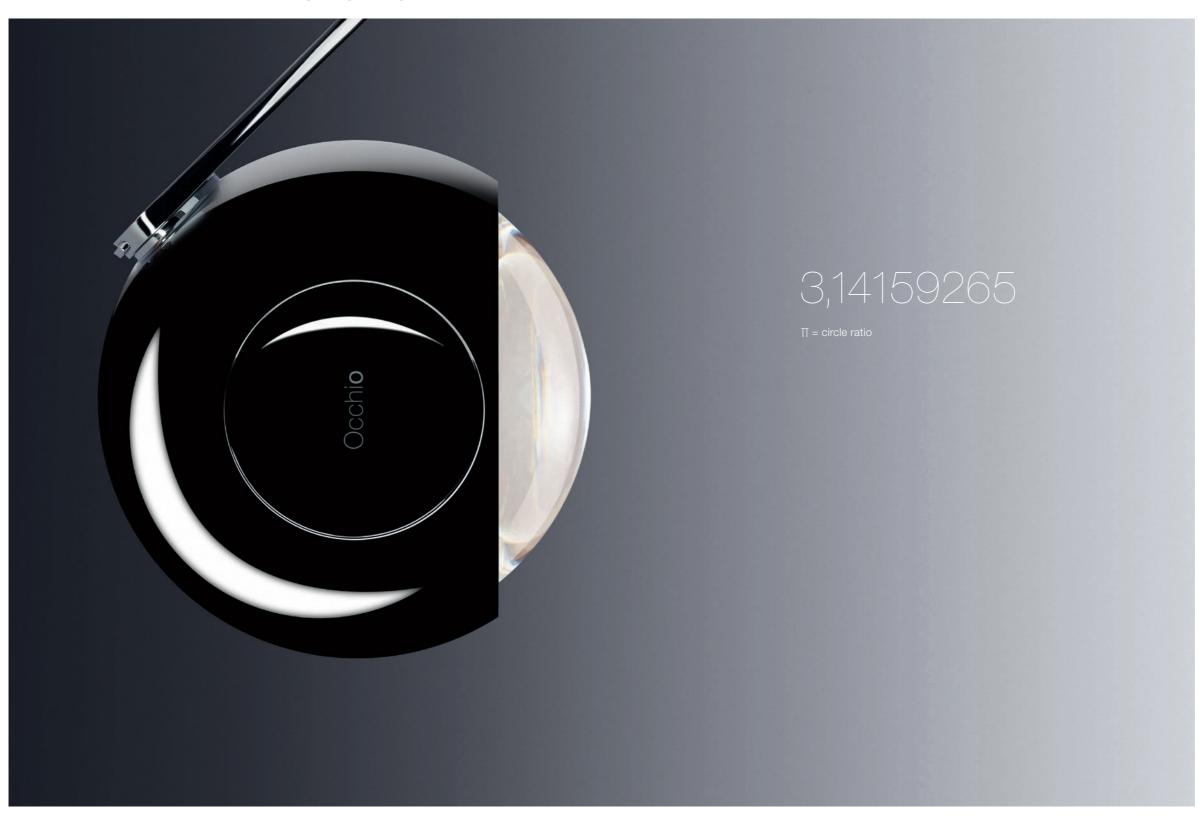



choose your light – thanks to an ingenious magnetic catch, the lens can be removed with a simple twisting motion and individually configured with up to two optical inserts. The lighting effect can thus be tailored exactly to the situation.



3d movability – the unique Occhio 3d joint lets the luminaire head of io virtually float and enables total movability within the room – with magical movement.

joy of light – the io luminaire series is synonymous with joy: joy in the playful use of light. Joy in the individual design options of the luminaire and the lighting effects. Joy in the perfect synthesis of form and function.

M series/io 3d M series/io 3d

io 3d luminaire system – features



Intuition through innovation – new technology creates new freedom. Naturally, the brightness can be controlled where the light originates: on the head of the luminaire. With a simple gesture, the light can be switched on and off or can be dimmed intuitively and touchless.





touchless control – io 3d table, floor and suspended luminaires can be operated without touching them thanks to an infrared sensor system. In the case of wall and ceiling luminaires, the gesture control system can be enabled or disabled as necessary.



create your style – the changeable grip pads, available in different colors, provide extraordinary options for customization.



Fascinating, distinctive surface combinations allow scope for individual tastes. Because the characteristic grip pads can be changed using magnets, the look of the luminaire can be altered again and again.





io 3d tavolo
base ø 14 cm, body 360° rotatable, 90° adjustable,
13W, dimmable via »touchless control« (at the head)

io 3d tavolo
base ø 18 cm, body 360° rotatable, 90° adjustable,
13W, dimmable via »touchless control« (at the head)

floor luminaires

light source 2700K/3000K, perfect color LED (CRI97)

light
lighting effects and lumen indications see page 120

surfaces head

chrome, glossy white, glossy black, matt chrome, matt white, matt black, gold





surfaces body

chrome, matt chrome, matt white, matt black



surfaces base, pads

chrome, glossy white, glossy black, matt chrome, matt white, matt black












io 3d lettura 120-150 cm height adjustable, base ø 26 cm, body 360° rotatable, 135° adjustable, 13W, dimmable via »touchless control« (at the head)

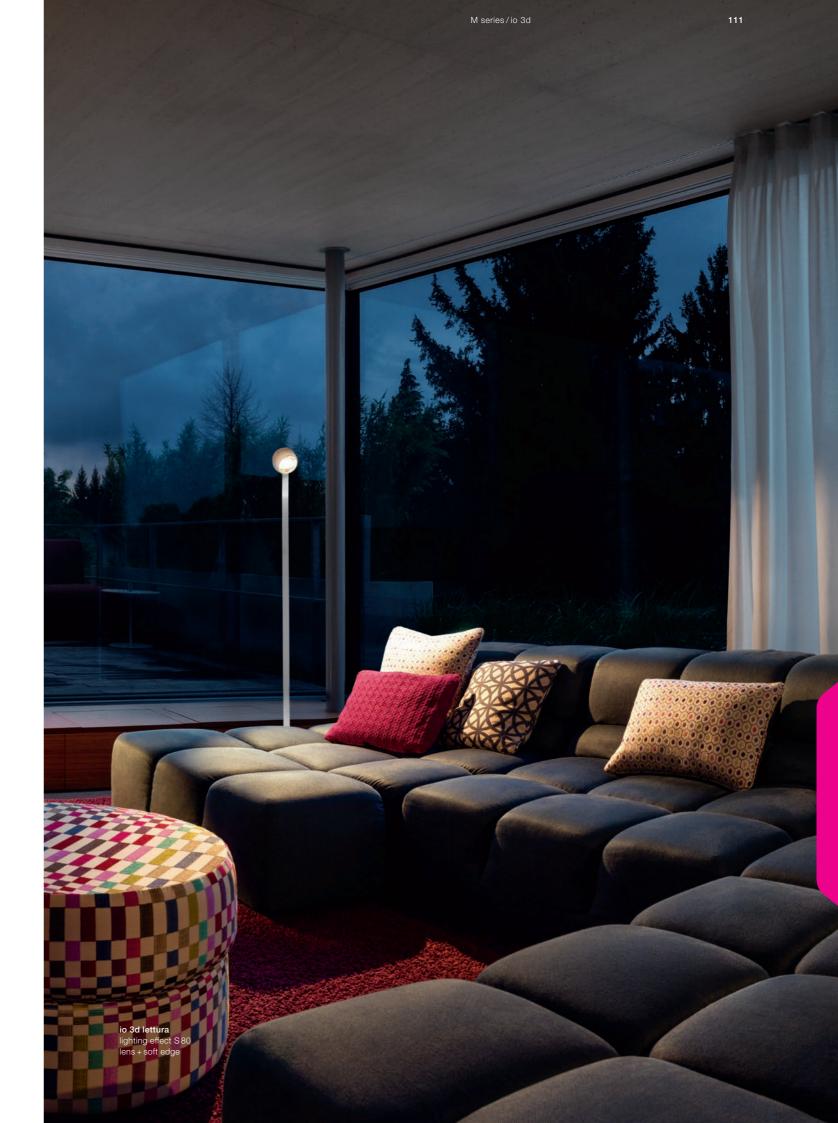

wall, ceiling and track spotlights

light source

2700K/3000K, perfect color LED (CRI 97)

lighting effects and lumen indications see page 120

mounting options

»flat« recessed »up« surface-mount

surfaces head

chrome, glossy white, glossy black, matt chrome, matt white, matt black gold anodised



surfaces body

chrome, matt chrome, matt white, matt black



surfaces base, pads

chrome, glossy white, glossy black, matt chrome, matt white, matt black



+create your light myOcchio.de










Occhio air control (optional) detailed informations can be found on page 158-165

io 3d pico wall and ceiling mount installation, body 360° rotatable, 90° adjustable, 18W/13W (switchable), dimmable via »touchless control« (at the head) or trailing-edge phase cut dimmer,

io 3d pico track

for track (Eutrac, Erco and compatible), body 360° rotatable, 90° adjustable, 18W/13W (switchable), dimmable via trailing-edge phase cut dimmer, also available as DALI-version

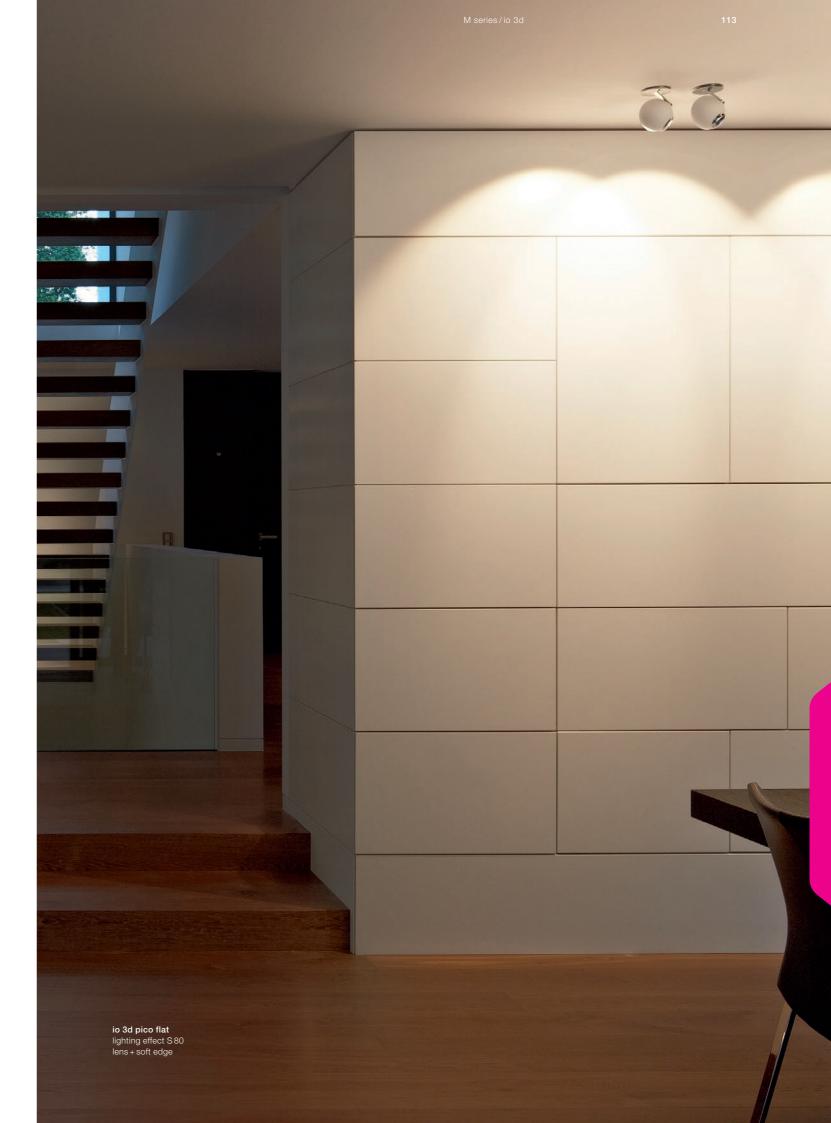

ceiling luminaires

light source 2700K/3000K, perfect color LED (CRI97)

lighting effects and lumen indications see page 120

mounting options

»flat « recessed »up « surface-mount

surfaces head

chrome, glossy white, glossy black, matt chrome, matt white, matt black gold





surfaces body chrome, matt chrome, matt white, matt black



surfaces base, pads

chrome, glossy white, glossy black, matt chrome, matt white, matt black





 $^+$ create your light myOcchio.de





Occhio air control (optional) detailed informations can be found on page 158-165

io 3d soffitto 20/30/60 cm, body 360° rotatable, 135° adjustable, 18W/13W (switchable), dimmable via trailing-edge phase cut dimmer or »touchless control« (at the head), and Occhio air



suspended luminaires

light source

2700K/3000K, perfect color LED (CRI 97)

lighting effects and lumen indications see page 120

mounting options

»flat« recessed »up« surface-mount

surfaces head

chrome, glossy white, glossy black, matt chrome, matt white, matt black, gold



surfaces body

chrome, matt chrome, matt white, matt black



surfaces base, pads

chrome, glossy white, glossy black, matt chrome, matt white, matt black





surface canopy linea





cable length $80-180\,\mathrm{cm}$, body $360\,^\circ$ rotatable, head $135\,^\circ$ adjustable, $18\,\mathrm{W}/13\,\mathrm{W}$ (switchable), dimmable via »touchless control« (at the head) and Occhio air, alternatively via trailing-edge phase cut dimmer, also available as track-version (dimmable via trailing-edge phase cut dimmer or DALI)





Occhio air control (optional) detailed informations can be found on page 158-165

io 3d linea tre cable length 80 – 180 cm, body 360° rotatable, 135° adjustable, L 125 cm, luminaire distance adjustable 40 – 60 cm or L 185 cm luminaire distance adjustable 60 – 90 cm, 3 × 18 W/3 × 13 W (switchable), dimmable via »touchless control « (at the head) and Occhio air, alternatively via trailing-edge phase cut dimmer, synced luminaire heads

io 3d linea due (no figure) with 2 heads, L 125 cm, luminaire distance adjustable $80-120\,\mathrm{cm}$, io 3d linea quattro (no figure) with 4 heads, L $185\,\mathrm{cm}$, luminaire distance adjustable $30-70\,\mathrm{cm}$



io duna

surfaces head chrome, glossy white, glossy black, chrome, matt white, matt black, gol





create your light



With the io duna shape spotlights, flush mounted elements allow the striking spherical head to be integrated seamlessly into the organically shaped ceiling. Thanks to their basic form, the spotlights are fully mobile and can be angled freely in the room.







io duna
plastering element 49 × 49 cm, body 360°
rotatable, 60° swiveling, 18 W, dimmability depends on power supply unit or dimmable via Occhio air

io duna in plastering element 30 × 30 cm with »click mount « mechanism, head 360° rotatable, 30° swiveling, 18 W, dimmability depends on power supply unit or dimmable via Occhio air

io 3d/io duna

lighting effects




lighting effect \$100 lens + satinised glass 100°, diffused light 910 lm (18 W), 630 lm (13 W)



M series/io 3d + io duna

lighting effect \$80 lens + soft edge glass 80°, soft contour 1070 lm (18 W), 740 lm (13 W)



lighting effect \$60 lens + Fresnel lens 60°, bundled light 990 lm (18 W), 680 lm (13 W)



lighting effect C 80 lens 80°, directed light 1170 lm (18 W), 800 lm (13 W)



inserts



satinised glass for gently widened light cone (optional)



soft edge glass for soft light contours (optional)



Fresnel lens for additional focusing (optional)

lens




for glare-free, directed light, with magnetic catch




color filters
(optional, max.13\)
filter red
filter green
filter blue
filter gelb

122 M series/io 3d 123

io 3d lighting effects

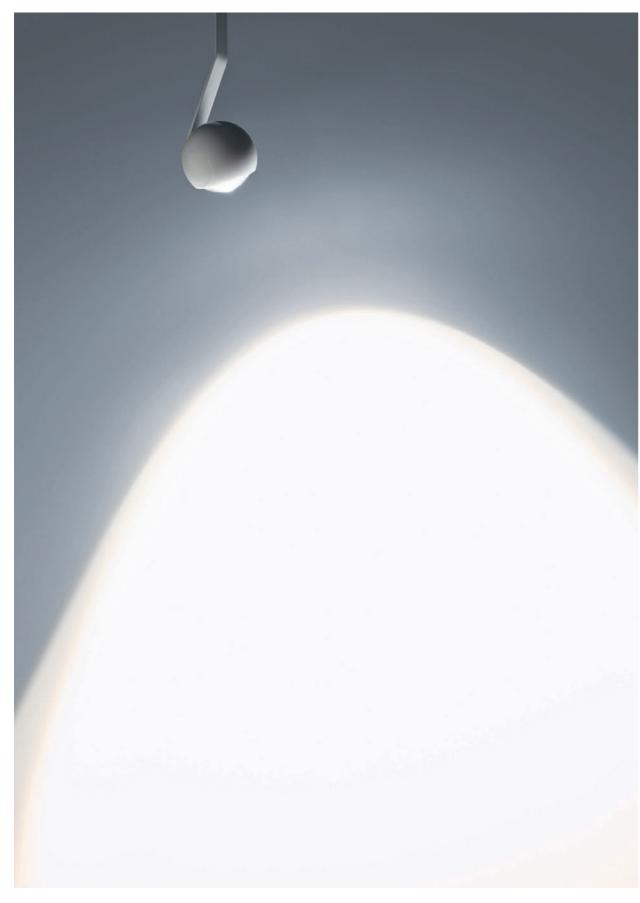


lighting effect C80

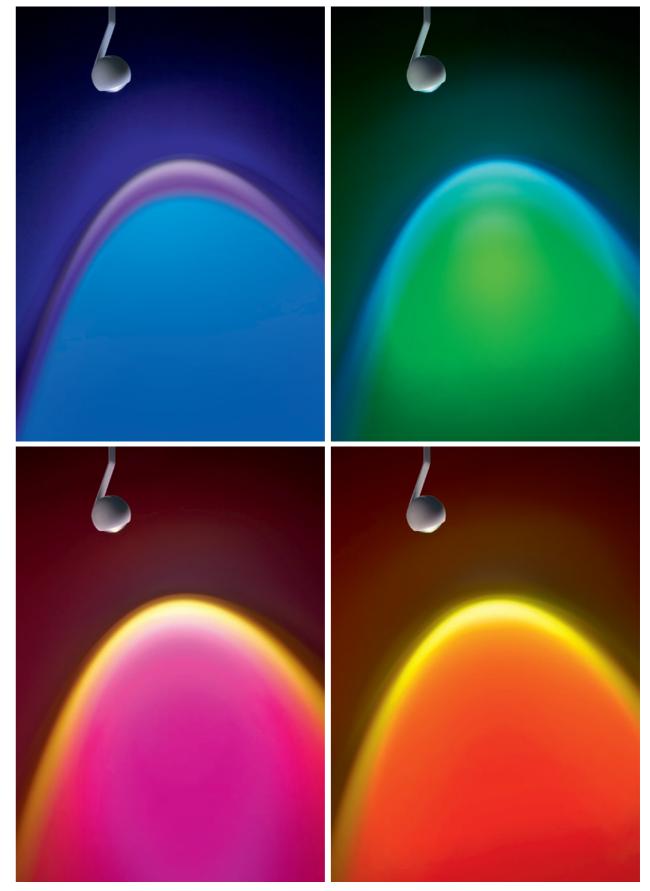

lighting effect C 80 lens + filter blue lens + filter magenta

lighting effect C 80 lens + filter green lens + filter red

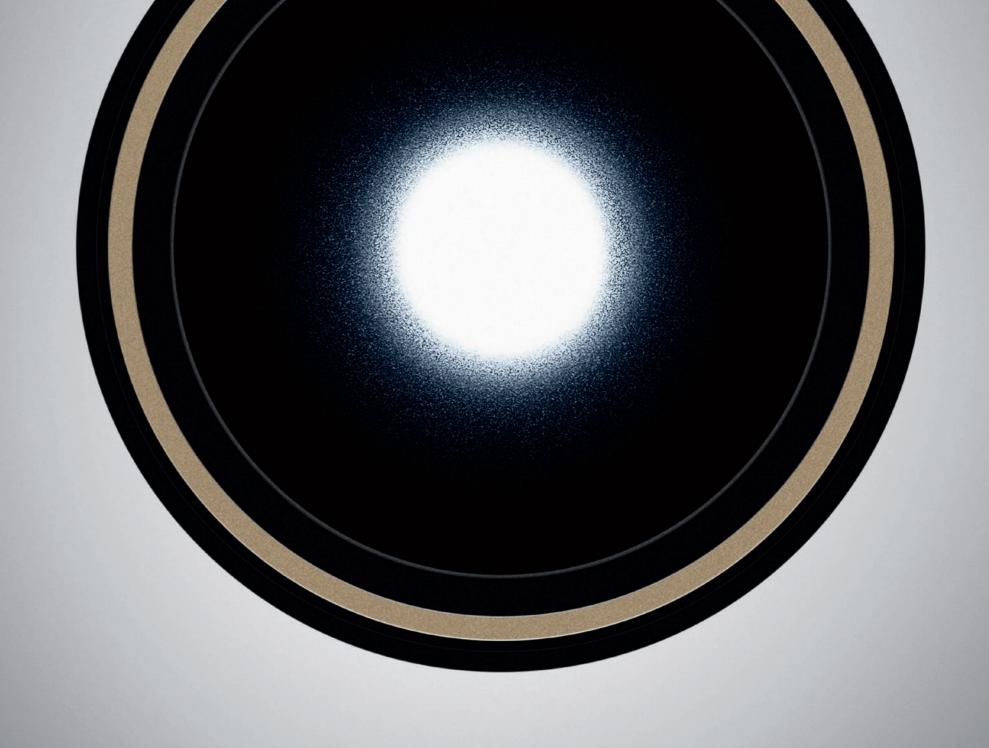



3d kinematics, interchangeable lenses, zoom – lui combines lighting technology and design in a radical form











126 M series/lui spotlights+lui 3d 127

lui
the multifunctional light tool






choose your light – you have the choice: with the zoom optic the light cone can be set anywhere between 20° and 60°. The lens optic uses interchangeable inserts to create precise lighting effects.

The lui spotlight system is lighting technology in its most beautiful form: interchangeable lenses as found in the field of photography open new lighting possibilities – with top quality light and maximum efficiency.

128 M series/lui spotlights 129

lui spotlights

recessed, surface mount and track spotlights – features

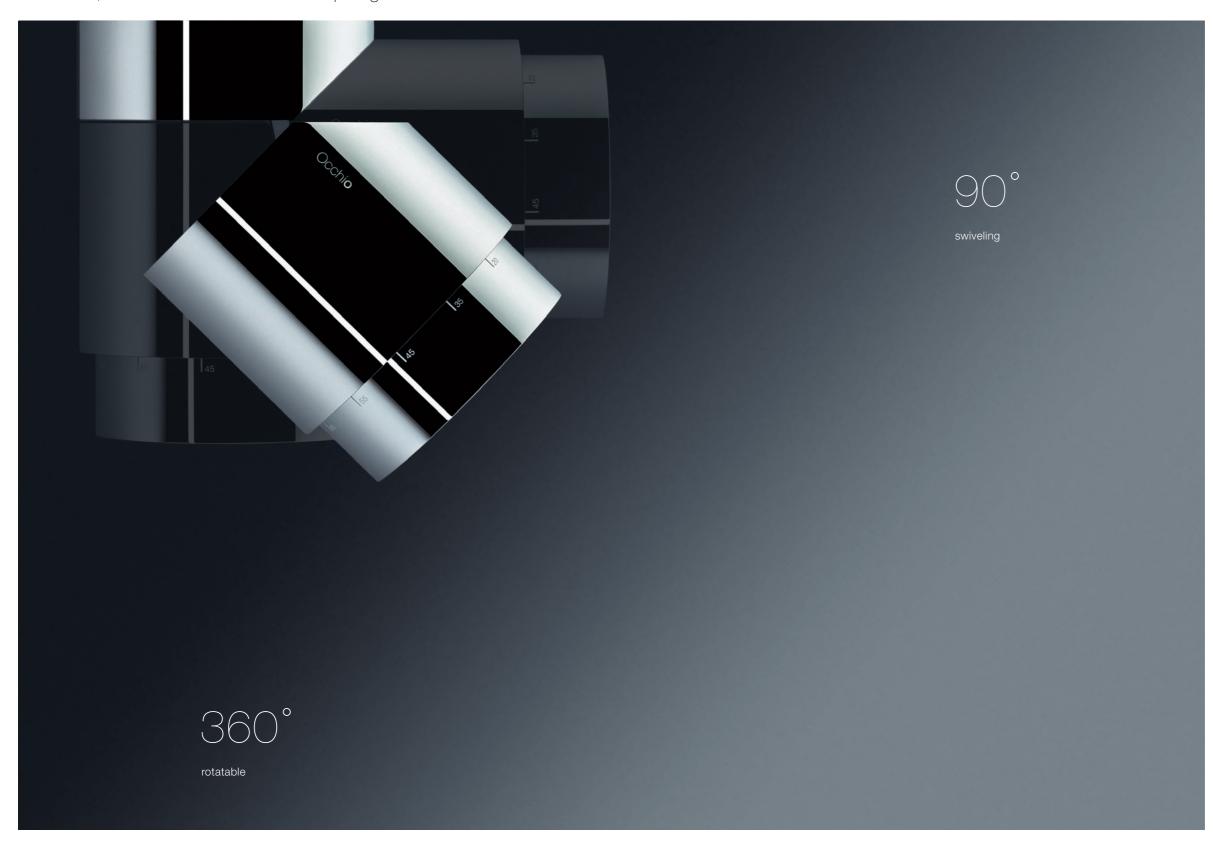



3d movability – the mobility of the spotlights is inspired by geometry. The virtually invisible joint mechanism really emphasizes the clear, functional form.



plug & play – Occhio VOLT makes working with light as easy as it was in the days of the light bulb. The innovative 230 V LED technology can be used without power supply units and allows revolutionary, pure design (lui surface mount spotlight).

The new lui spotlight range combines clear, minimalistic design, the latest LED technology and perfect lighting in a comprehensive range of recessed, surface mount and track spotlight systems.

surface mount and track spotlights

light source VOLT light engine (230 V), 2700 K/3000 K, perfect color LED (CRI 97), (»cc« constant current version optional)

lighting effects and lumen indications see page 140

lighting effects

zoom (continuous 20°-60°) or lens optic

surfaces head

chrome, matt white, matt black



surfaces optics

chrome, matt chrome, matt white, matt black, gold





surfaces base (doppio) matt white, matt black



surfaces in-trac-adapter silver, matt white, matt black



create your light myOcchio.de













surface mount, 360° rotatable, 90° swiveling, 18 W (chrome: 13 W), dimmable via trailing-edge phase cut dimmer, rotary knob on the rear side and Occhio air (»cc« version depending on power supply unit)

lui alto, lui alto v

lui alto mounting on hollow ceiling box, $360\,^{\circ}$ rotatable, $45\,^{\circ}$ swiveling / Iui alto v surface mount, fix (not swiveling), 18W (chrome: 13W), dimmable via trailing-edge phase cut dimmer, rotary knob on the rear side (not alto v) and Occhio air (»cc« version depending on power supply unit)







Occhio air control (optional) detailed informations can be found on page 158-165

lui alto doppio surface mount, head 360° rotatable, 45° swiveling, 2×18W (chrome: 2×13W), dimmable via trailing-edge phase cut dimmer, rotary knob on the rear side and Occhio air

lui alto track

with in-trac-adapter for 3-phase track (Eutrac/Erco), head 360° rotatable, 55° swiveling, 18 W (chrome: 13 W), dimmable via trailing-edge phase cut dimmer, rotary knob on the rear side and Occhio air



lui spotlights

recessed spotlights

light source »cc« (constant current), 2700K/3000K, perfect color LED (CRI97)

light lighting effects and lumen indications see page 140









surfaces cover chrome, matt white, matt black, gold







myOcchio.de









lui piano square

with square cover, 360° rotatable, head $45\,^{\circ}$ swiveling, 18 W (chrome: 13 W), dimmability depends on power supply unit or dimmable via Occhio air

lui piano round

with round cover, 360° rotatable, head 45° swiveling, 18 W (chrome: 13 W), dimmability depends on power supply unit or dimmable via Occhio air

lui piano seamless

for flush recessed, seamless mounting, 360° rotatable, head 45° swiveling, 18 W (chrome: 13 W), dimmability depends on power supply unit or dimmable via Occhio air









lui piano v square

with square cover, sole downlight, 18 W (chrome: 13 W), dimmability depends on power supply unit or dimmable via Occhio air

lui piano v round with round cover, sole downlight, 18 W (chrome: 13 W), dimmability depends on power supply unit or dimmable via Occhio air

lui piano v seamless

for flush recessed, seamless mounting, sole downlight, 18W (chrome: 13W), dimmability depends on power supply unit or dimmable via Occhio air

M series/lui 3d M series/lui 3d

lui 3d spotlight system – features



The perfect combination of form and function—three dimensional mobility, outstanding LED light quality and optimum energy efficiency for precise lighting for both residential and public settings.





3d movability – the Occhio 3d joint defines the characteristic slant of the lui luminaire head while simultaneously allowing it to move freely in the room.

lui 3d

wall, ceiling and track spotlights

light source 2700K/3000K, perfect color LED (CRI 97), (»cc« constant current version optional)

lighting effects and lumen indications see page 140

lighting effects zoom (continuous 20°-60°) or lens optic

mounting options

»flat« recessed »up« surface mount

surfaces head, base

chrome, glossy white, glossy black, matt chrome, matt white, matt black



surfaces body chrome, matt chrome, matt white, matt black



surfaces optics

matt black, gold





create your light myOcchio.de









Occhio air control (optional) detailed informations can be found on page 158-165

 lui 3d pico
 lui 3d pico track

 wall- and ceiling mounting, body 360° rotatable, 90° adjustable, 18 W (chrome: 13 W), dimmable via
 for track (Eutrac, Erco and compatible), body 360 rotatable, 90° adjustable, 18 W (chrome: 13 W),
 at the head, and Occhio air

lui 3d pico track for track (Eutrac, Erco and compatible), body 360° trailing-edge phase cut dimmer or rear slide control dimmable via trailing-edge phase cut dimmer, also available as DALI version



lui 3d floor spotlights

light source 2700K/3000K, perfect color LED (CRI97)

light lighting effects and lumen indications see page 140

surfaces head, base chrome, glossy white, glossy black, matt chrome, matt white, matt black











lui 3d basso base ø14 cm, body 360° rotatable, 90° adjustable, 18 W (chrome: 13 W), dimmable via rear slide control at the head



lui spotlights/lui 3d

lighting effects

zoom



M series / lui spotlights + lui 3d



zoom optic soft edge glass (standard) VOLT 690 lm (18 W) »cc« 890 lm (18 W)

lens optic soft





lens optic lens med. + soft edge »cc« 1010 lm (18 W)




»cc«1010 lm (18 W)

S40 40°

lens optic lens med. + Fresnel VOLT 630 lm (18 W)

»cc« 910 lm (18 W)



30°

lens optic lens high + Fresnel »cc« 940 lm (18 W)

contour



C80 80°

lens optic »cc« 1010 lm (18 W)









zoom optic



adjustable lens 20-60°





lenses

















The first shade luminaire with adjustable radiance











144 M series/lei 3d 14

lei 3d
the luminaire system with magical transformation





choose your light – when the iris is open, it allows the light to be directed outwards. If it is closed, the translucent shade lights up from inside, producing a remarkably atmospheric light.

Extroverted or introverted, shade luminaire or spotlight – lei is the new variability of light. It surprises with its sophisticated lighting system: an adjustable iris allows various light moods to be created.

146 M series/lei 3d 14

lei 3d luminaire system – features



lei celebrates the magic of variability. With an elegant lightness, it shows off its extraordinary flexibility thanks to its modularity and 3d movability. A variety of style options with various color combinations offer maximum freedom of design. lei can thus be perfectly coordinated with the architecture and interior design of the room.





create your style – the interchangeable rings and covers of the luminaire head are available with various surfaces and can therefore be customized individually.



3d movability – the unique Occhio 3d joint invisibly connects the head of the lei luminaire to the luminaire body, allowing free, three-dimensional movement.

lei 3d

table and floor luminaires

light source 2700K/3000K, perfect color LED (CRI97)

lighting effects and lumen indications see page 154

surfaces body

chrome, matt chrome, matt white, matt black



surfaces base, ring, cover

chrome, glossy white, glossy black, matt chrome, matt white, matt black, gold (only ring, cover)







surface shade matt white (translucent)

+ create your light myOcchio.de



lei 3d tavolo 40 cm, base ø 18 cm, body 360° rotatable, 135° adjustable, 9 W, dimmable via sensor button on the rear side



lei 3d lettura 120-150 cm, base ø26 cm, body 360° rotatable, 135° adjustable, 9 W, dimmable via sensor button on the rear side



wall, ceiling and suspended luminaires

light source

2700K/3000K, perfect color LED (CRI97)

lighting effects and lumen indications see page 154

mounting options

»flat« recessed »up« surface-mount

surfaces body

chrome, matt chrome, matt white, matt black



surfaces base, ring, cover

chrome, glossy white, glossy black matt chrome, matt white, matt black gold (only ring, cover)



surface shade

matt white (translucent)



create your light myOcchio.de



 $15\,\text{cm},\,\text{body}\,360\,^\circ$ rotatable, $135\,^\circ$ adjustable, 9 W, dimmable via trailing-edge phase cut dimmer or sensor button on the rear side (head), and Occhio air








Occhio air control (optional) for detailed informations see page 158-165

lei 3d soffitto

20/30/60 cm, body 360° rotatable, 135° adjustable, 9 W, dimmable via trailing-edge phase cut dimmer or sensor button on the rear side (head), and Occhio air, also available as track-version

lei 3d sospeso cable length 80-280 cm, body 360° rotatable, 135° adjustable, 9 W, dimmable via sensor button on the rear side (head) and Occhio air, alternatively via trailing-edge phase cut dimmer, also available as track-version

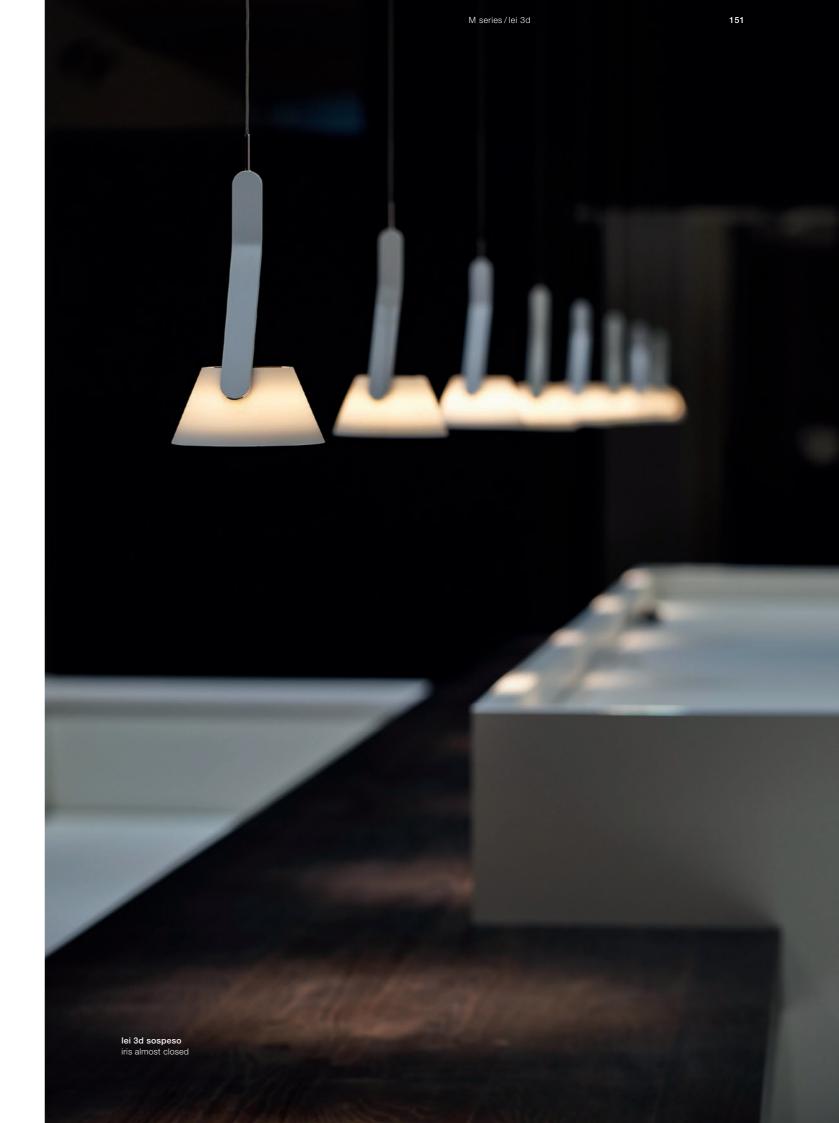

lei 3d

suspended luminaires

light source

2700K/3000K, perfect color LED (CRI 97)

lighting effects and lumen indications see page 154

surfaces body

chrome, matt chrome, matt white, matt black



surfaces ring, cover

chrome, glossy white, glossy black matt chrome, matt white, matt black gold (only ring, cover)







surface shade

matt white (translucent)

canopy linea matt white

+ create your light myOcchio.de





Occhio air control (optional) for detailed informations see page 158-165

lei 3d linea tre cable length 80 –180 cm, body 360° rotatable, 135° adjustable, L 125 cm, luminaire distance adjustable 40 – 60 cm or L 185 cm luminaire distance adjustable 60 – 90 cm, 3×9 W, dimmable via sensor button on the rear side (head) or trailing-edge phase cut dimmer, and Occhio air, synced luminaire heads

lei 3d linea due (no figure) with 2 heads, L 125 cm, luminaire distance adjustable 80-120 cm, lei 3d linea quattro (no figure) with 4 heads, L 185 cm, luminaire distance adjustable 30-70 cm



154

M series/lei 3d

M series/lei 3d 155

lei 3d lighting effects






soft edge glass 560 lm (9W)


head



lens for glare-free, directed light

ring







soft edge glass (SE version with soft edge) for a fixed proportion of direct and ambient light (can be changed with magnetic catch)








Occhio air

design by light - simple, intuitive and from anywhere

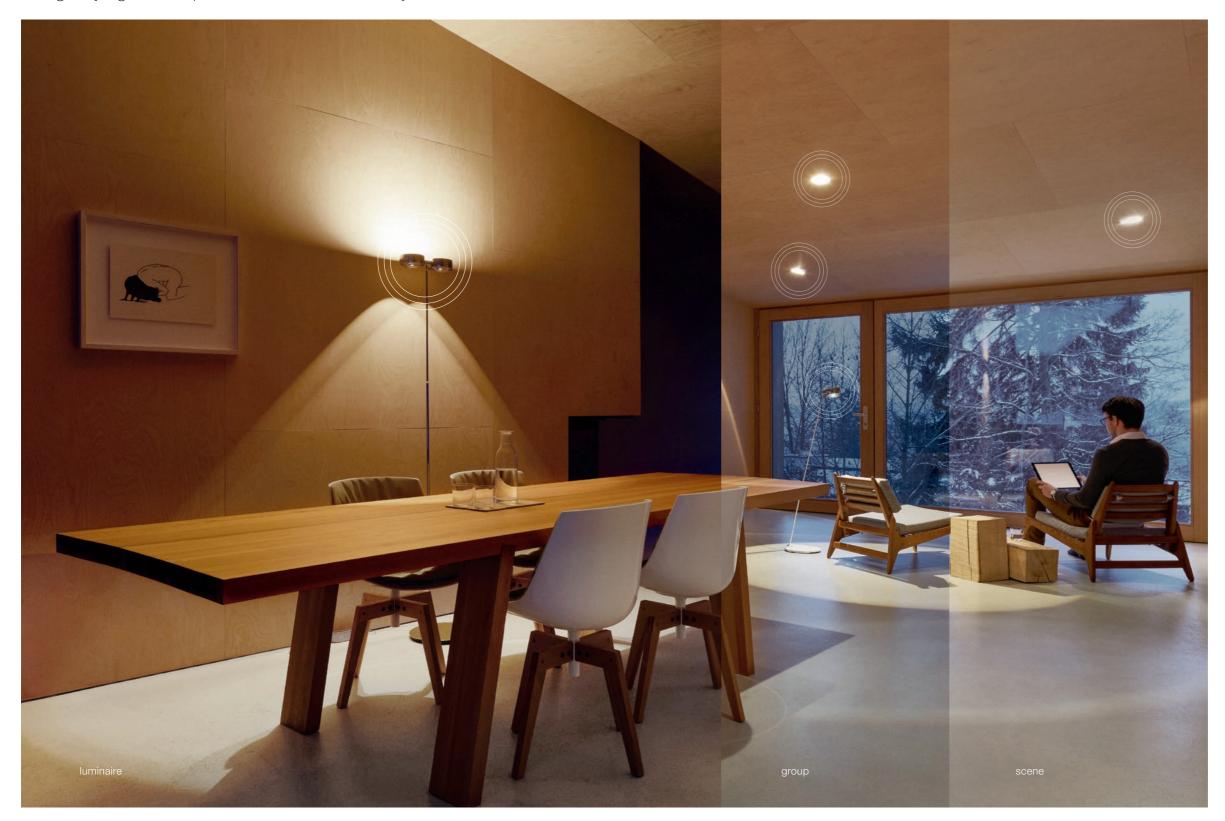



luminaire – control of individual luminaires



group – control multiple luminaires simultaneously



scene - create lighting
scenes and recall them

Create a mood in your rooms simply by a push of a button. No matter whether you want to turn on, dim or fade lights or possibly even create entire lighting scenarios or groups – Occhio air provides you with individual design options that can be changed at any time with the help of its simple installation and intuitive operation.

Occhio air

the new freedom with light





switching - on/off



dimming - continuous
brightness control



up/down fading – staging the atmosphere in your room (Sento/Sento sospeso)



Occhio air + touchless control -Occhio air can be combined with the intuitive gesture control system. (Sento/Sento sospeso)


Occhio air maximum ease of use for every situation



166 innovation / fading innovation /

up/down fading

directing the light in the room

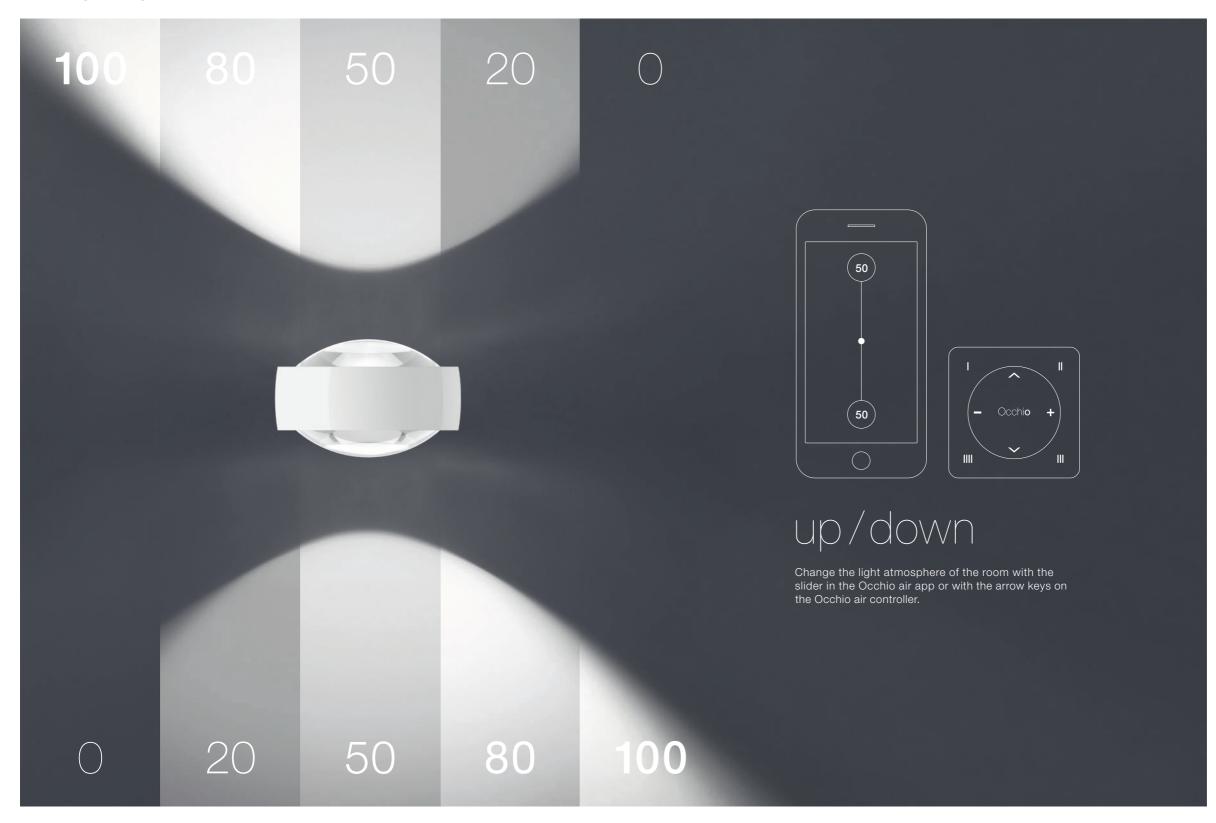



up/down fading – with the help of gesture control or Occhio air, the entire luminous power can be pulled from one side to the other.

up/down preset – every imaginable ratio from uplight to downlight can be set and saved. Uplight and downlight can now be dimmed on the basis of stored settings.





ento Sento sospeso



Occhio air – the intuitive Bluetooth-control, directly integrated in the head (optional).

up/down fading is a truly unique feature of Occhio. The light, of one or more luminaires, can be drawn from one side to the other in any ratio and thereby creates novel ways to change the lighting mood of a room. The system is operated by "touchless control" or Occhio air.

168 innovation / fading innovation / fading

touchless control

intuition through innovation






touchless control – with the help of »touchless control«, light can be switched, dimmed or faded by the lightbeam with a hand – touchlessly and intuitively thanks to innovative infrared sensors.





Sento





Sento sospeso





New technology creates new freedom. It almost goes without saying that brightness is controlled at the light source, the head of the luminaire. Switch the light on or off or dim it with a simple gesture – intuitively without touching it.

170 innovation / VOLT light engine 171

VOLT light engine

the start of a new era





dimmable via a trailing-edge phase cut dimmer



color temprature selectable 2700 K or 3000 K



efficient thanks to the latest LED technology



adjustable luminance 32 (RS)/26/18/13W



long life > 40.000 h

Occhio's VOLT light engine is the first on the market a vailable 230 V LED that combines all key qualities into a single module.

172 innovation / VOLT light engine 173

VOLT light engine

plug & play





plug & play – with VOLT, you will no longer have to think twice about technical consideration when you select a luminaire or bring a good lighting concept to life: The luminaires can be directly connected to the supply voltage without using any power supply units.

Pure design thanks to VOLT light engine: The integration of all components into one module creates new design possibilities. innovation / perfect light 17

perfect light

quality of light means quality of life

wavelengths

390 nm 450 nm 500 nm 600 nm 700 nm 780 nm

The only valid lighting reference for Occhio is the sun itself. The quality of light of our new perfect color LEDs comes very close to this ideal: Colors appear with as much nuance and depth as they do in nature. Because quality of light means quality of life.

Color randarine

The perceived quality of light is determined by the quality of rendering of the visible light spectrum. The measuring unit is the so-called color rendering index (CRI). As a reference, natural sunlight has a CRI of 100. The Occhio »high color« LEDs come very close to this ideal with a CRI of 97, producing the best possible color rendering.







































imprint

editor
Occhio GmbH
Wiener Platz 7
81667 München
Tel +49 89 44 77 86 30
Fax +49 89 44 77 86 39 info@occhio.de

Geschäftsführer Axel Meise, Klaus-Peter Siemssen HRB 133172/USt-Id DE 813 013 462

conception/design Martin et Karczinski

www.martinetkarczinski.de

3D visualisations Sunday Digital GmbH, www.sndy.tv

photos
Tim Klein (Getty Images)
Hubertus Hamm, www.hubertushamm.de
Robert Sprang, www.rsfotografie.de
Thomas Popinger, www.popinger.de
Christian Schmidt, www.christianschmidt.com
Nadine Ingold, www.ingold.de
Bodo Mertoglu, www.mertoglu.de
cc Arquitectos, www.ccarquitectos.com uwe lukas schneider, www.uwelukasschneider.de

print Eberl Print GmbH Kirchplatz 6, 87509 Immenstadt im Allgäu www.eberl.de

English
2017 | 01 – 1st edition
Subject to errors and technical change.

© Occhio GmbH 2017

